

BUSH  
DORIC  
DEFIANT  
EIRE  
GRANADA  
MURPHY

## General Information

*The range of receivers covered by this Service Information incorporate main chassis type A823AV and varicap tuner units in place of the mechanical tuners fitted to the earlier range of single standard colour receivers. These receivers are basically similar to the earlier range but use the Z582 I.F. and Sound Output panel instead of the A809 or Z182 panels; and the Z584 Decoder instead of the A807 or Z180 panels. Information noting the differences between the Z582 and the Z182, and between the Z584 and the Z180 are given below.*

The principal information contained in this publication concerns the varicap tuner and a.f.c. panel type Z513 (incorporating a.f.c. panel type Z512 and u.h.f. tuner type Z511). This standard unit covers the u.h.f. bands 4 and 5, but if required, these receivers may be converted for operation on v.h.f. bands 1 and 3 by fitting conversion kit type Z564 (which includes unit type Z570, which in turn incorporates a.f.c. panel Z512 and v.h.f. tuner type Z565). The v.h.f. unit type Z565 is manufactured by Mullard Ltd: no detailed information on this unit is included in this publication.

Title	Page No.
Printed Panel Variants . . . . .	1
Circuit Description . . . . .	2
Alignment Procedure, Z513 . . . . .	2
Adjustment Procedure, Z584 . . . . .	3
Parts Lists—Electrical . . . . .	6
Mechanical . . . . .	7


### I.F. and Sound Output Panel, Type Z582.

This panel is identical to panel, type Z182 apart from the inclusion of a pre-set Colour control mounted on the panel adjacent to the plug 2Z3. This pre-set control replaces the function served by the Customer Colour control on the Z182 panel. Also as part of this change resistor 2R35, 18k $\Omega$ , is moved to holes adjacent to, and in series with the pre-set control.

### Decoder and R.G.B. Drive Panel, Type Z584.




This panel is a development of the decoder type Z180. The Z584 incorporates provision for con-

trolling picture saturation at high level instead of the low level control of the chrominance amplifier employed on the Z182 i.f. panel. This development involves the replacement of the LK1 on the Z180 panel with a 0.1 $\mu$ F capacitor, 3C65 Part Number 2601 0070 and the connection of the Customer Colour control, to two of the test point pins, 3TP27 and 3TP25, these pins becoming plugs 3Z11 and 3Z6 respectively. The Customer Colour control now operates at high level and controls the gain of the chrominance channel within the SL917A s.i.c. This change has necessitated amendments to be made to the decoder Adjustment Procedure, see Page 3.

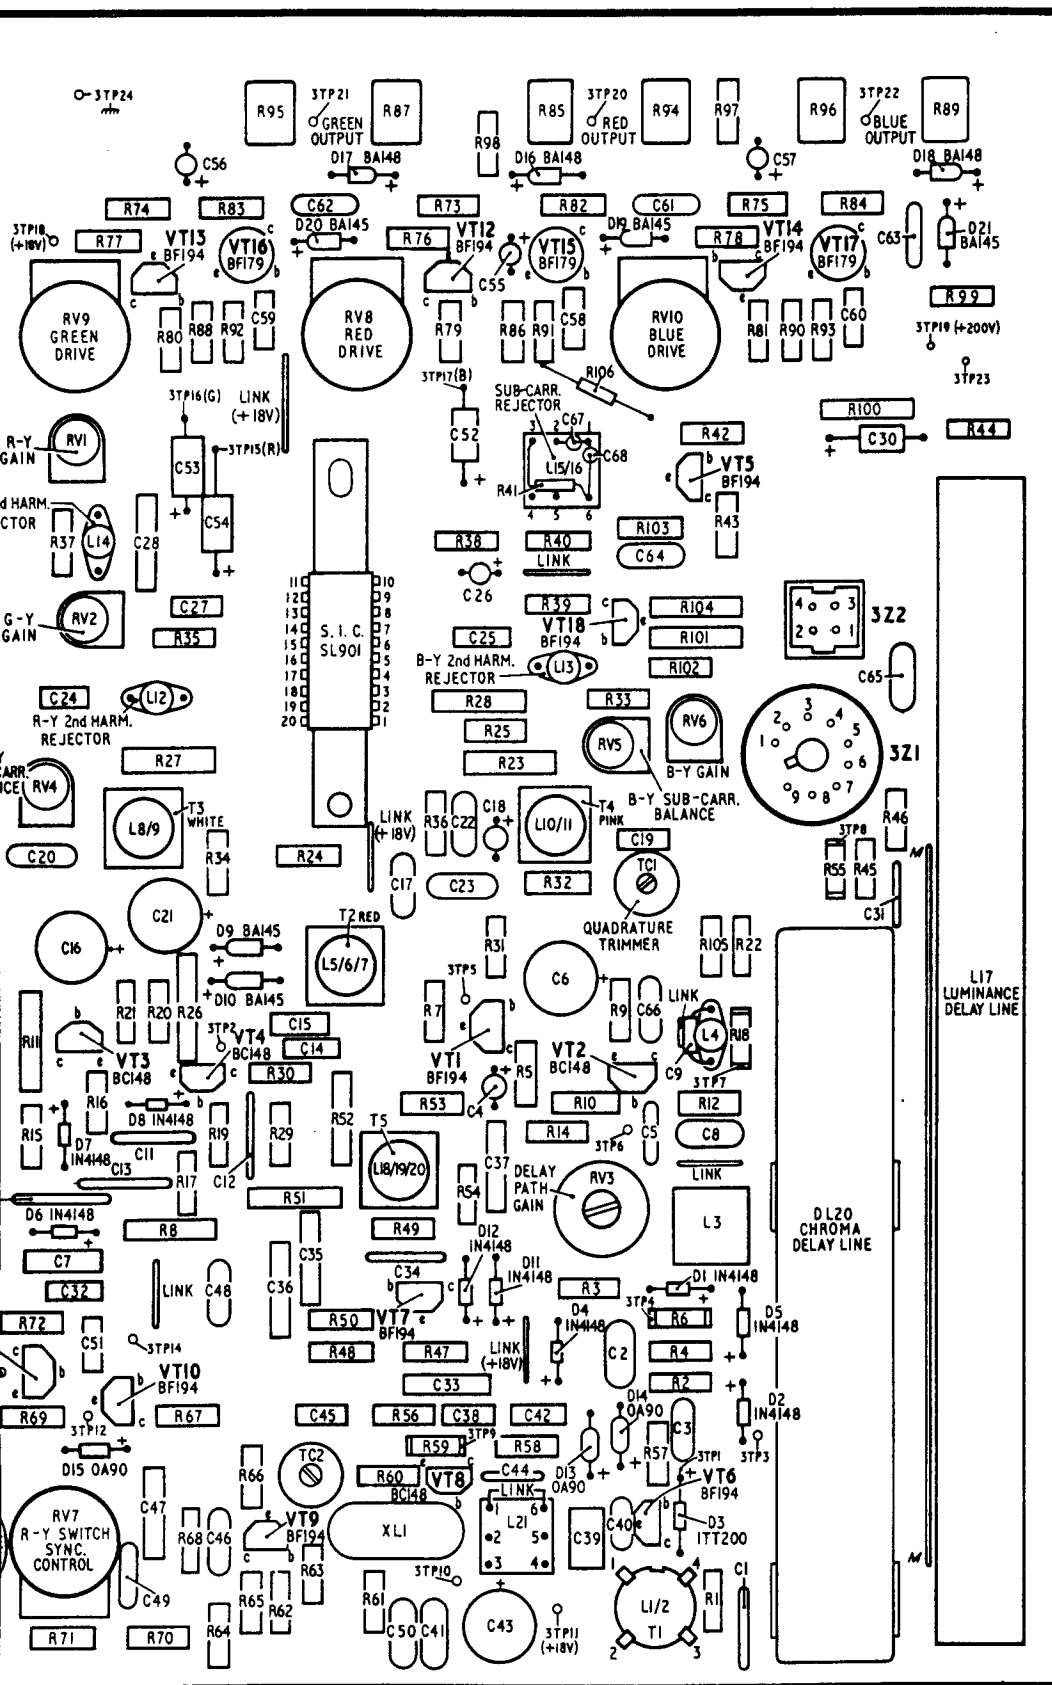

5547




R.G.B. DRIVE PANEL Type A807







TO 871  
tag 1  
& 8C5

CAPACITOR PL



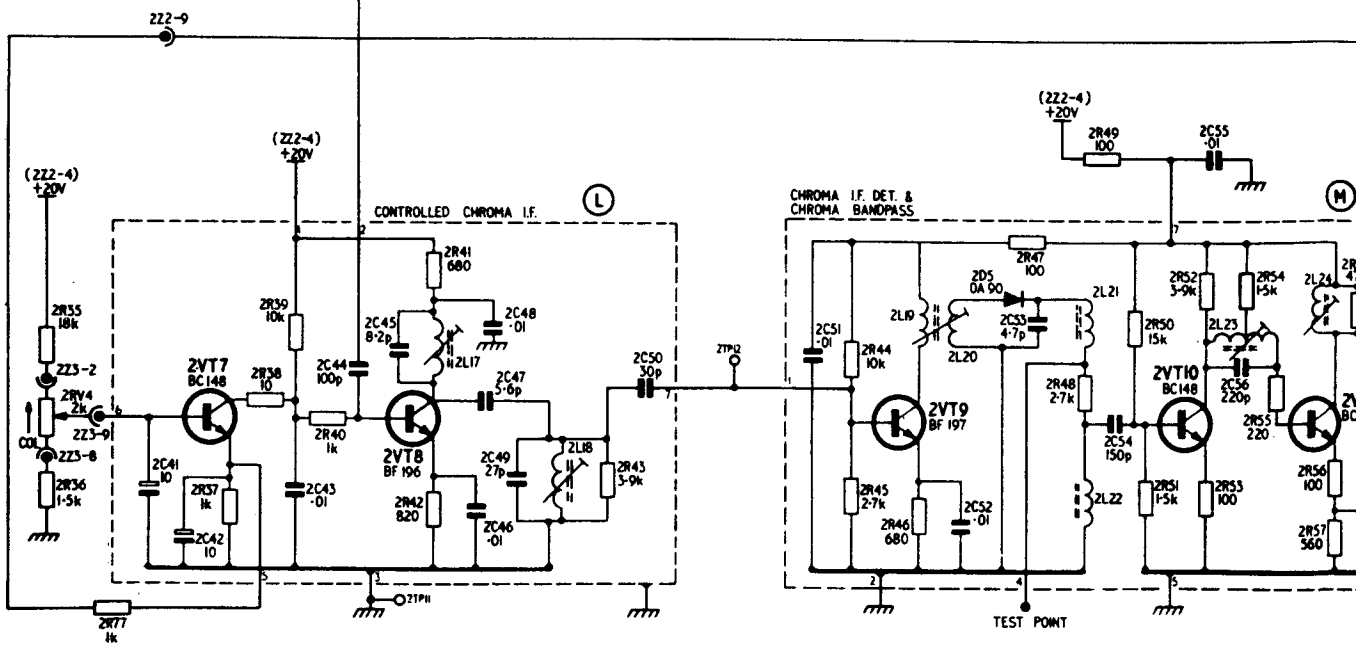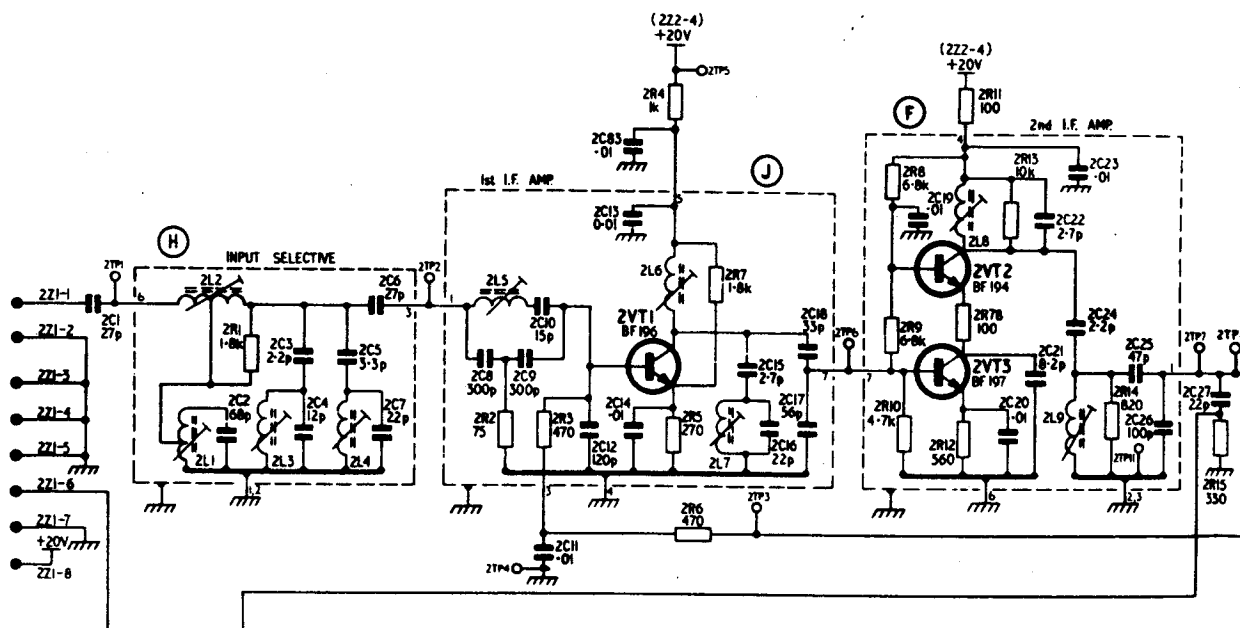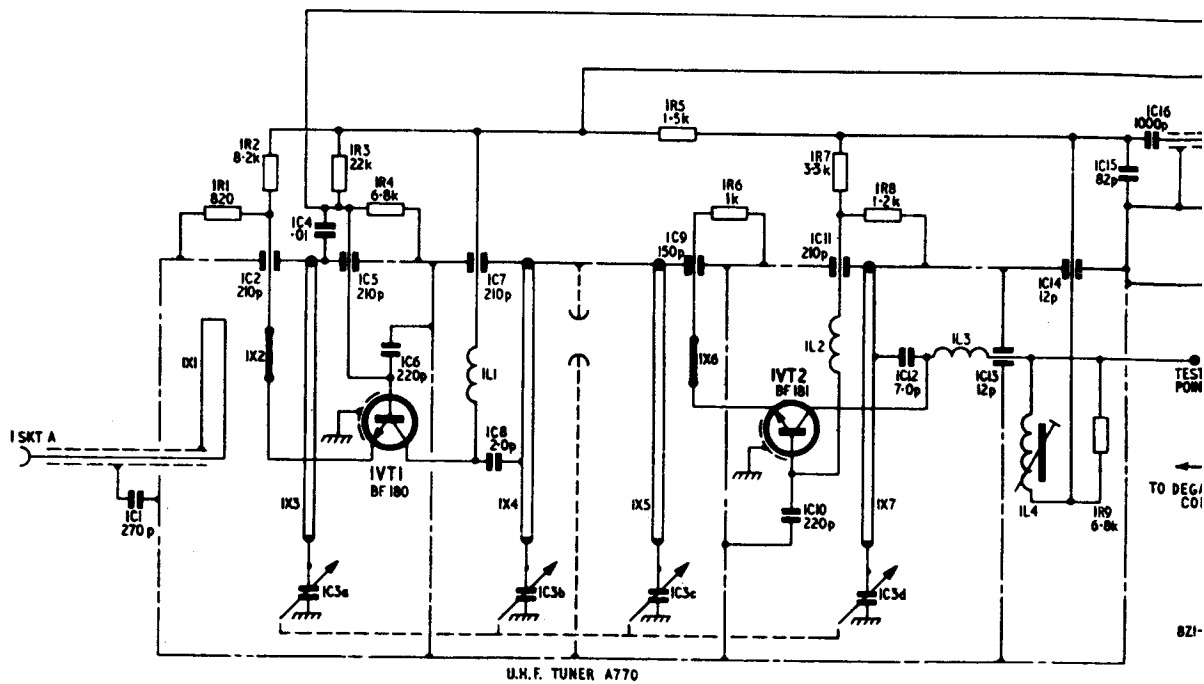




NO COLOUR  
22 WHITE  
21 WHITE

UNIT PLUG NO COLOUR  
RECEIVER 322 WHITE TUBE BASE 421

BLACK



INDICATES CLOCKWISE  
ROTATION OF  
VARIABLE RESISTORS

LOBS & TRANSISTORS  
N PINS  
WED ON WINDINGS

RESISTOR VALUES IN  $\Omega$   
CAPACITOR VALUES IN  $\mu F$   
UNLESS OTHERWISE STATED


Ref.	Type	Electrode Voltage			Remarks
		emitter	base	collector	
4VT1	BC117	-76.0	-74.0	2.0	
4VT2	BC171	-85.0	-78.0	-75.0	
5VT1	BC170B	0	0	9.0	
5VT2	BSY84	0.1	0	3.1	
5VT3	BC108	0	0	17.4	
5VT4	BC170B	2.6	3.1	17.5	
5VT6	BC147	5.8	6.0	16.0	
5VT7	BD131	0	0.4	20.0	
5VT8					
5VT9	BC148	0	0	1.2	
5VT10	AC128	1.5	1.3	0	
5VT11	BD131	21.5	22.0	35.0	
5VT12	BD131	0.75	1.4	22.0	
6VT1	BU105	N.T.	N.T.	N.T.	
6VT2	BU105	N.T.	N.T.	N.T.	
7VT1	AC128	—	—	—	Connected as diode
7VT2	AC128	—	—	—	Connected as diode

5THY1	BRY39	Cathode	C. Gate	Anode	A. Gate
		0	0	4.1	6.2
Ref.	Pin No.	Electrode		Voltage	
4V1					
	1	Heater		6.3V a.c.	
	2	Cath., Red		130	
	3	Grid, Red			
	4	A <sup>1</sup> , Red			
	5	A <sup>1</sup> , Green			
	6	Cath., Green		130	
	7	Grid, Green			
	8	No. Pin			
	9	A <sup>2</sup> , Focus		5-8kV	
	10	No. Pin			
	11	Cath., Blue		130	
	12	Grid, Blue			
	13	A <sup>1</sup> , Blue			
	14	Heater		Chassis	

# CIRCUITS DIAGRAM

# I.F. & SOUND OUTPUT PANEL Type A809


MISC.	R	C
VT15		
VT16		
VT14	74 76 75	76
VT13	65 66 67 68	81
	73	
Z4	71 72 77 75 70	79 78 82
VT12		40
L29		80
D7	64	74
TP15	35 21	39
L28	63	
	72 84 73	
Z3		
	22 36	63
TP14	49	55
	18	
TP8		34
TP13		
TP12		
TP11		
Z2	77 15	27
L15		
	23	
TP10	26	
TP9		
VT5		
L16		
RV2	36	
	24 11 35	
TP4	25	
D2	31	
TP6	27	
	30	38
D3	28	
TP5	33	83
VT6	29	
TP3	32	
RV3		11
TP2		37
D4	34	
TP1		
Z1		1

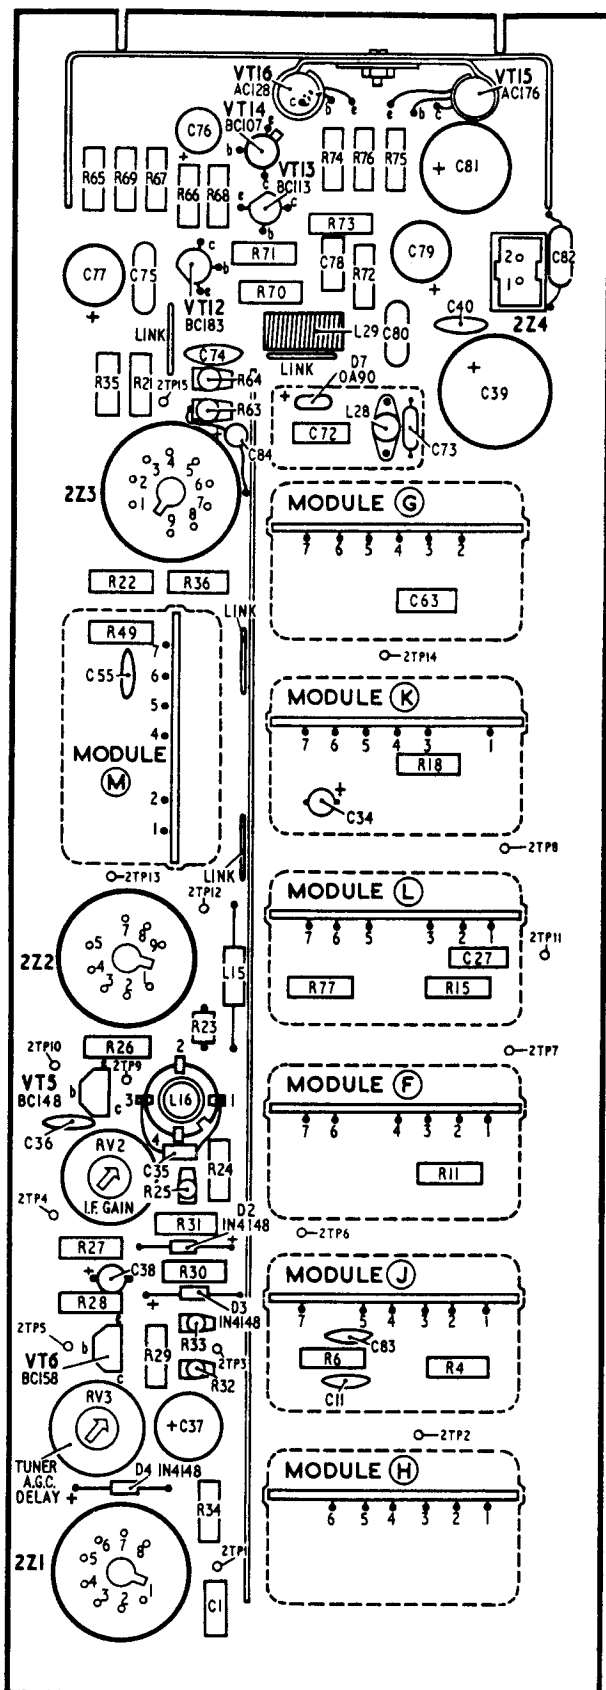

5543


# POWER SUPPLY PANEL TY

MISC.	R	C
F3	D1	1
	2	4 3
Z4		4
	9	6
D2	BR1	8 7
VT1	10	
D3	RV1	
F1	11	7
THY1		
	13	14
	12	8
TH2	22	5
TH1		
VDR1		
F2		
Z3	21	

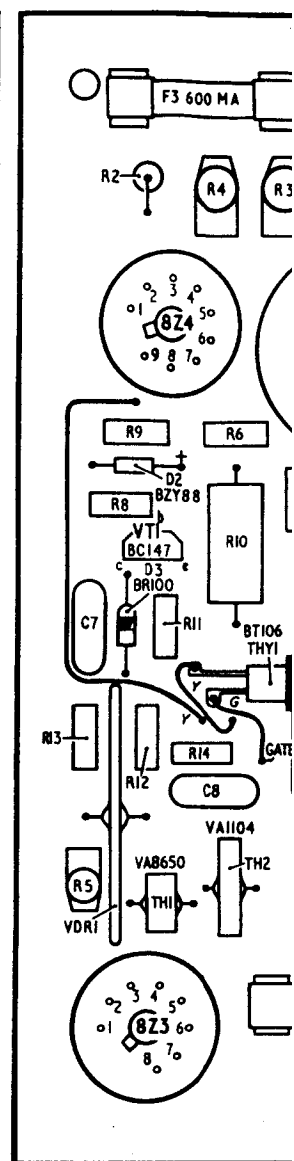


# POWER SUPPLY PANEL Type A801

MISC	R	C
F3 DI	1	
	2 4 3	
Z4		4
		3
D2	9 6	
BRI	8 7	
VTI	10	
D3 RVI		7
F1	11	
THY1		
	13 14	
	12	8
TH2		
Z2	5	
TH1		
VDR1		
F2		
Z3		
Z1		

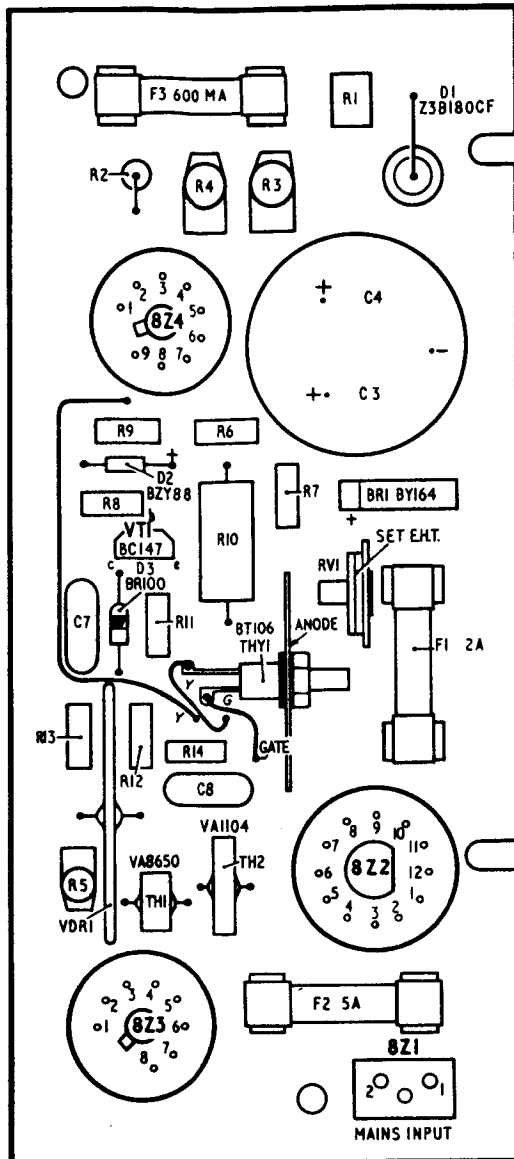


5556

# TUNER UNIT Type A770


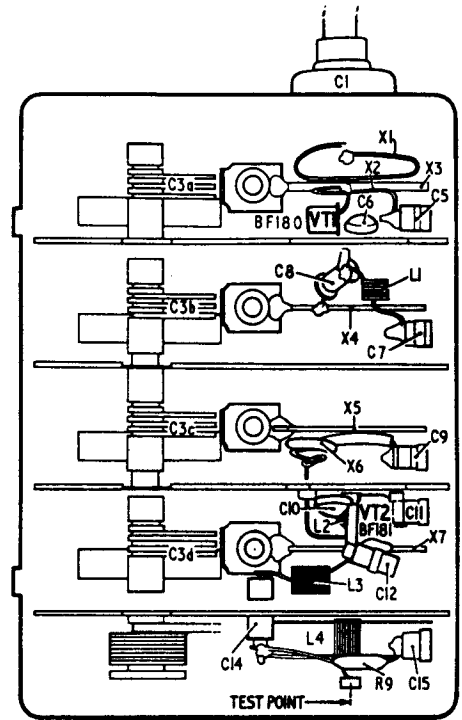


5541



A

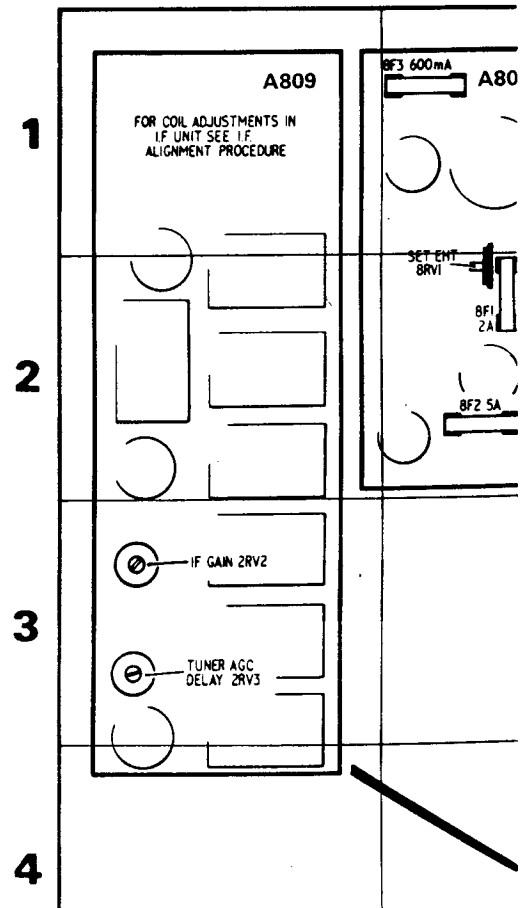

## CONVERGEN

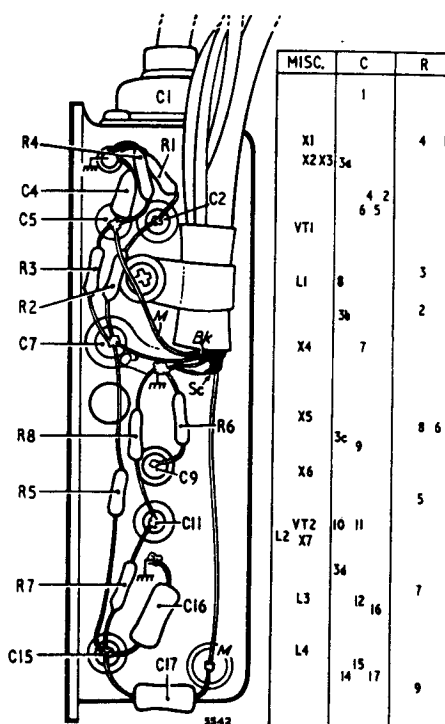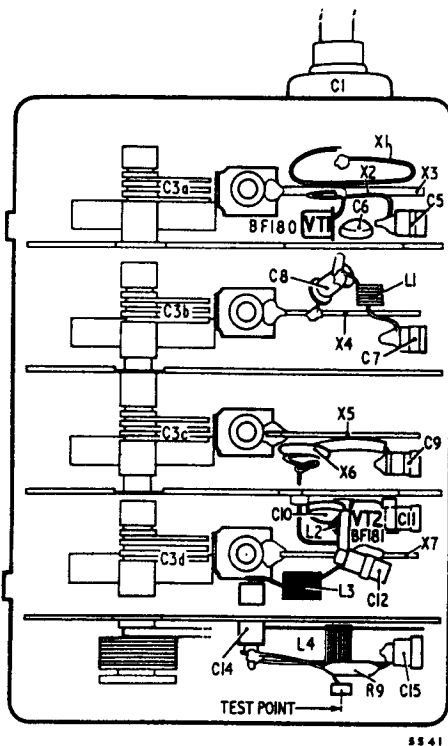

MISC	RV5 RV4 RV13	VTI
R		
C	1 9	

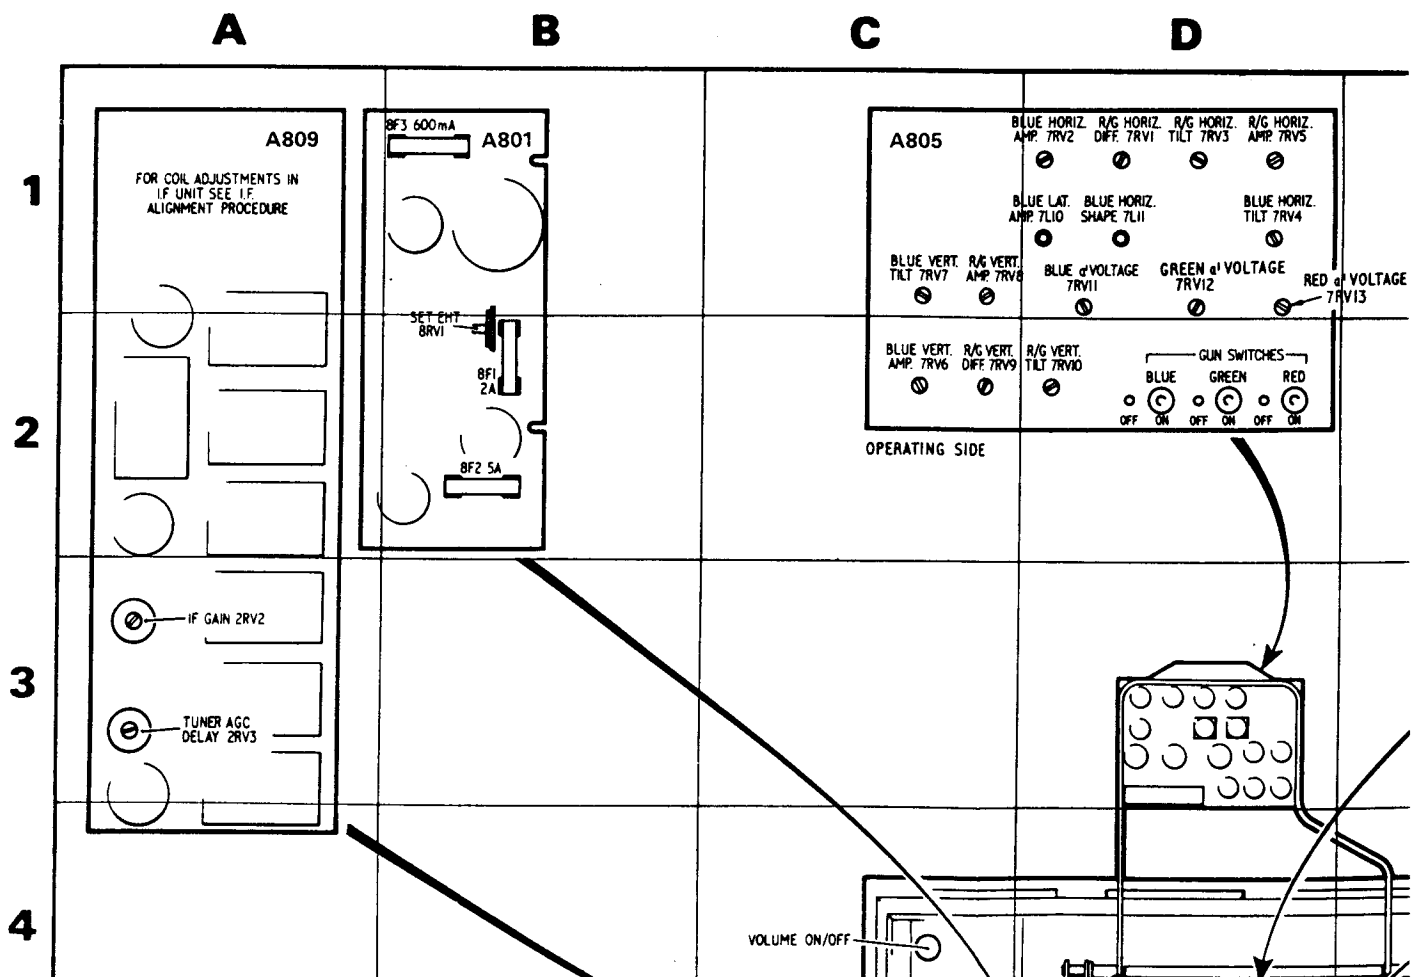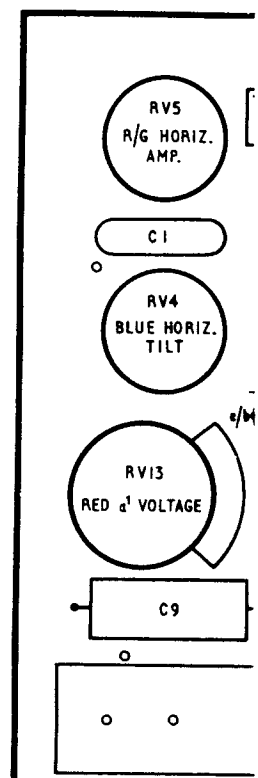




# CONVERGENCE UNIT Type A805 (Component side)

C	R
1	
4 2	4 1
6 5	
	3
	2
7	
	8 6
	5
11	
	7
12 16	
	9
15 17	

MISC	RV5 RV4 RV13	VT1	RV3 L9 RV12	RV1 L11	RV11	RV2 L10 RV10	VT2	RV8 RV9	RV7 RV6
R		4 10	2	9 8 3	1	7		6	5
C	1		3	8	7	2		6	5 4

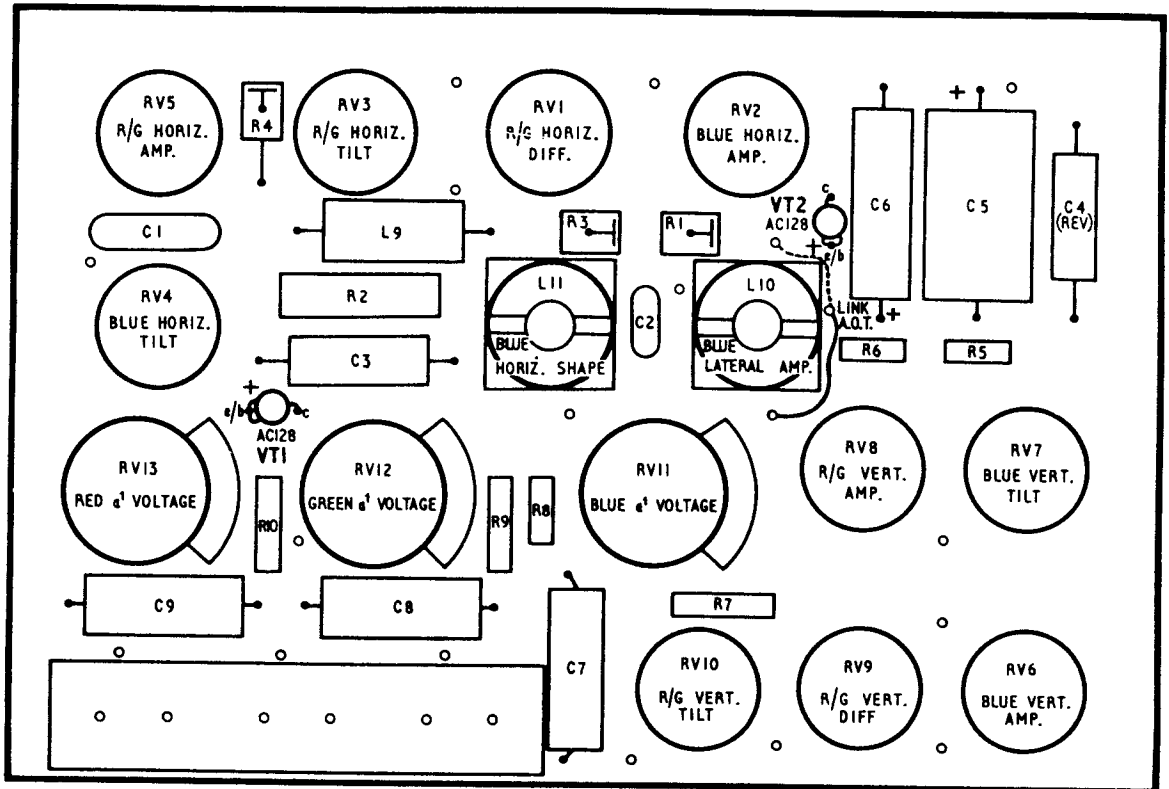


5534

D


E

F

G

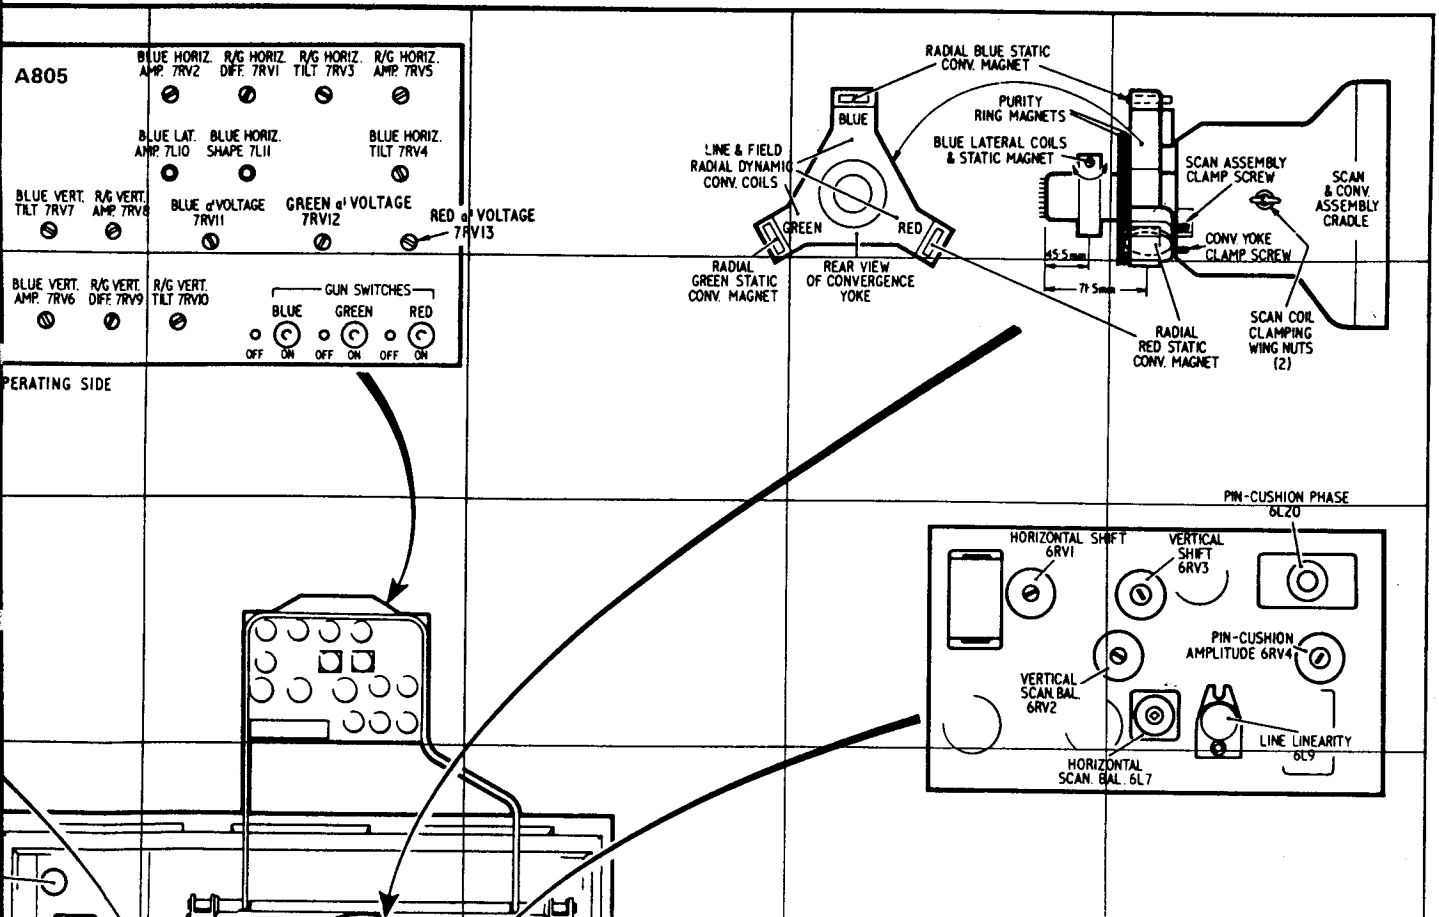


# SCAN CONTROL PANEL

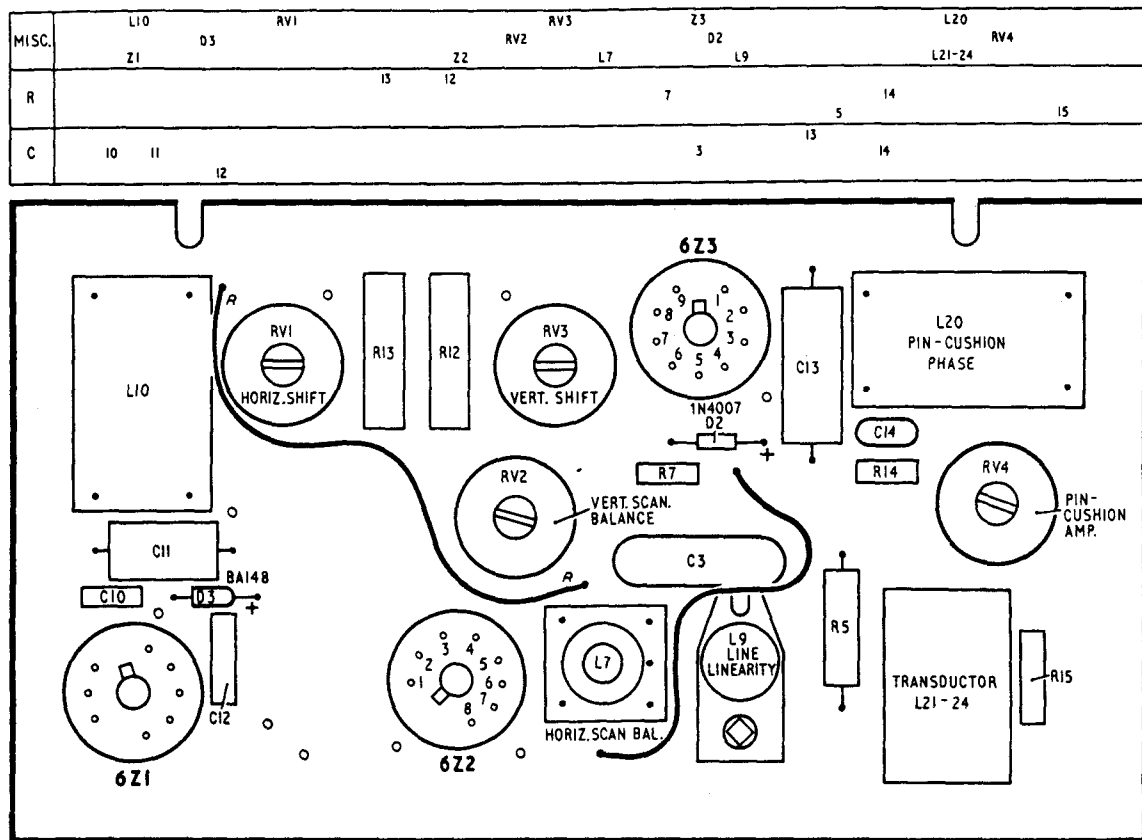


5552

5550

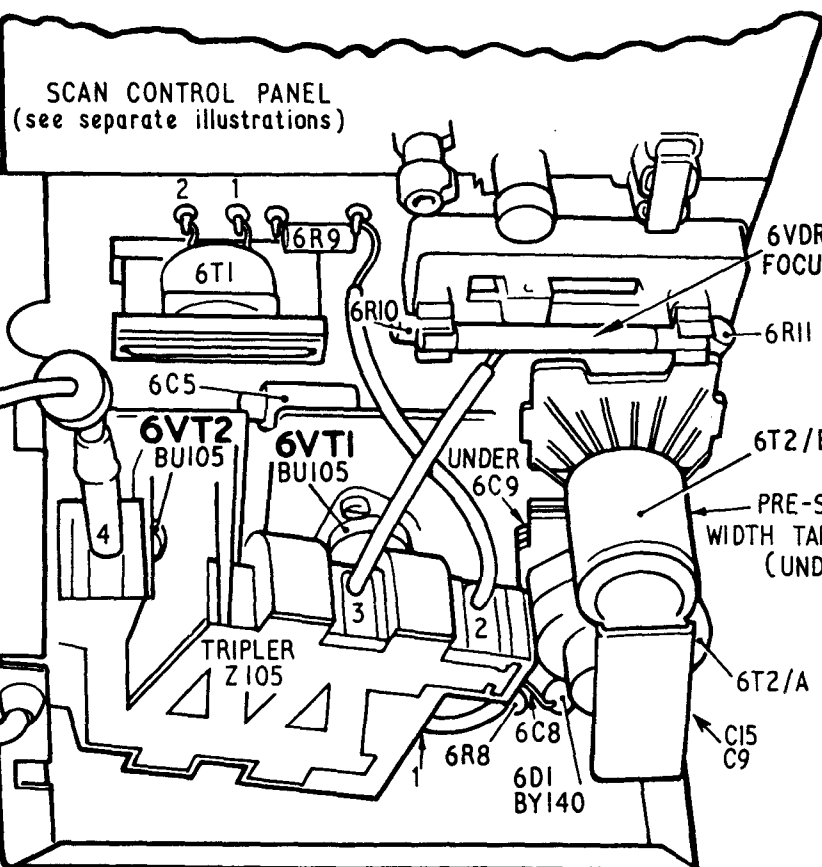


5549

SCAN CONTROL PANEL (see separate illustrations)



5896

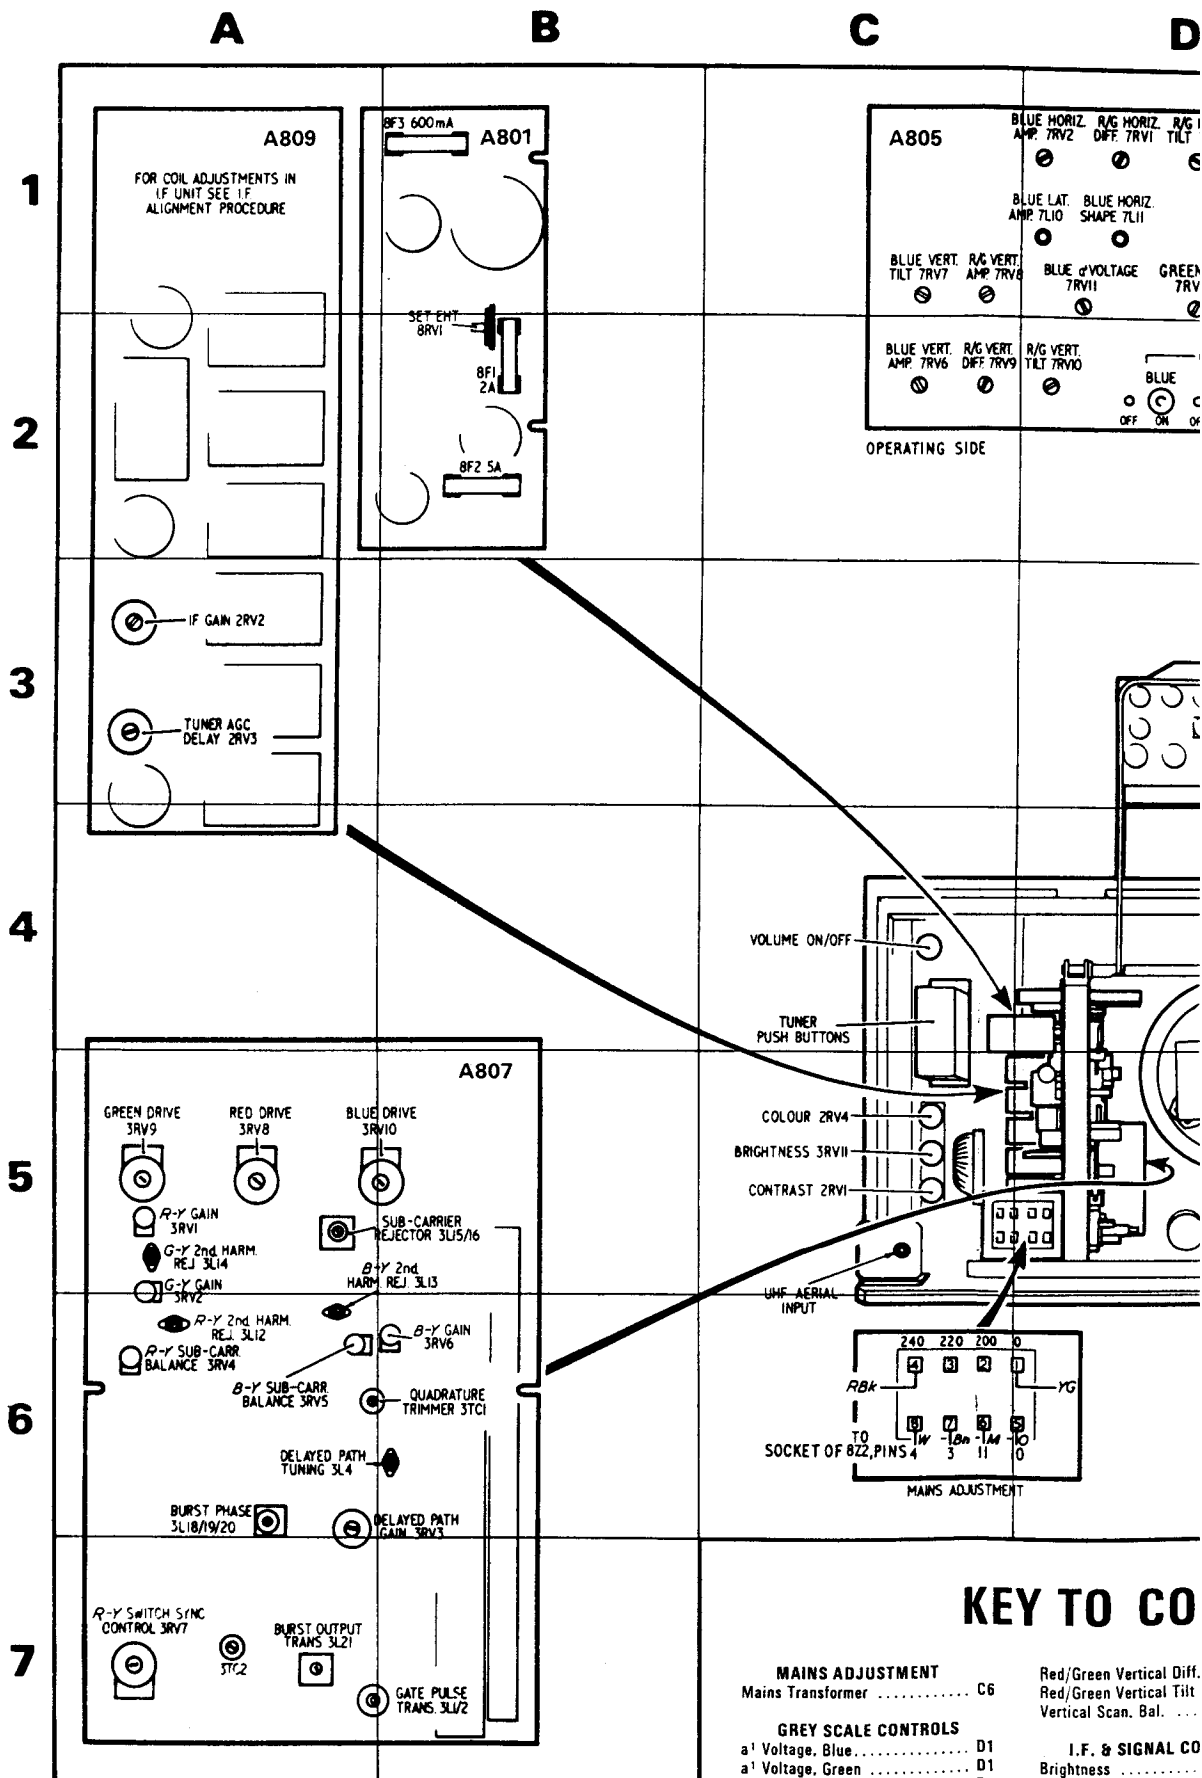

## KEY TO CO

<b>MAINS ADJUSTMENT</b>		
Mains Transformer	C6	Red/Green Vertical Diff.
		Red/Green Vertical Tilt
		Vertical Scan. Bal.
<b>GREY SCALE CONTROLS</b>		
a' Voltage, Blue	D1	I.F. & SIGNAL CO
a' Voltage, Green	D1	Brightness
a' Voltage, Red	D1	Colour
Blue Drive	B5	Contrast
Green Drive	A5	I.F. Gain
Red Drive	A5	Tuner A.G.C. Delay
Gun Switches	D2	Tuner Push Buttons
		Volume On/Off
<b>CONVERGENCE CONTROLS</b>		
Blue Horizontal Amp.	D1	LINE TIMEBA
Blue Horizontal Shape	D1	E.H.T. CONT
Blue Horizontal Tilt	D1	Discriminator Balance
Blue Lateral Amp.	D1	Discriminator Transform
Blue Lateral Coils	F1	Focus
Blue Vertical Amp.	C2	Horizontal Shift


C

D





E

F

G

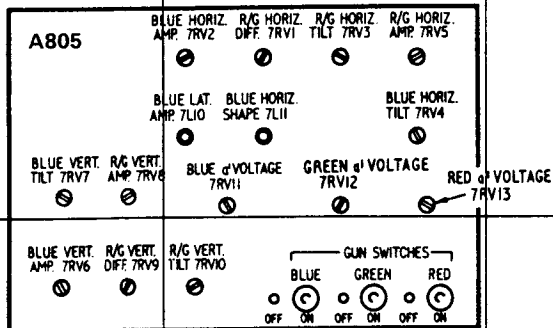

OPERATING SIDE

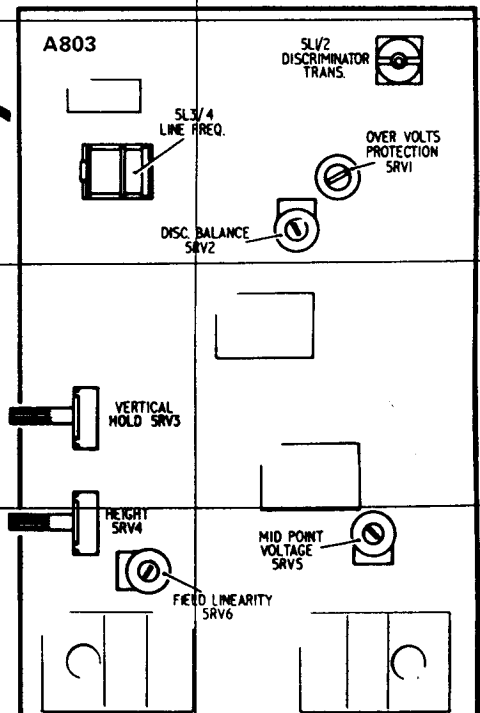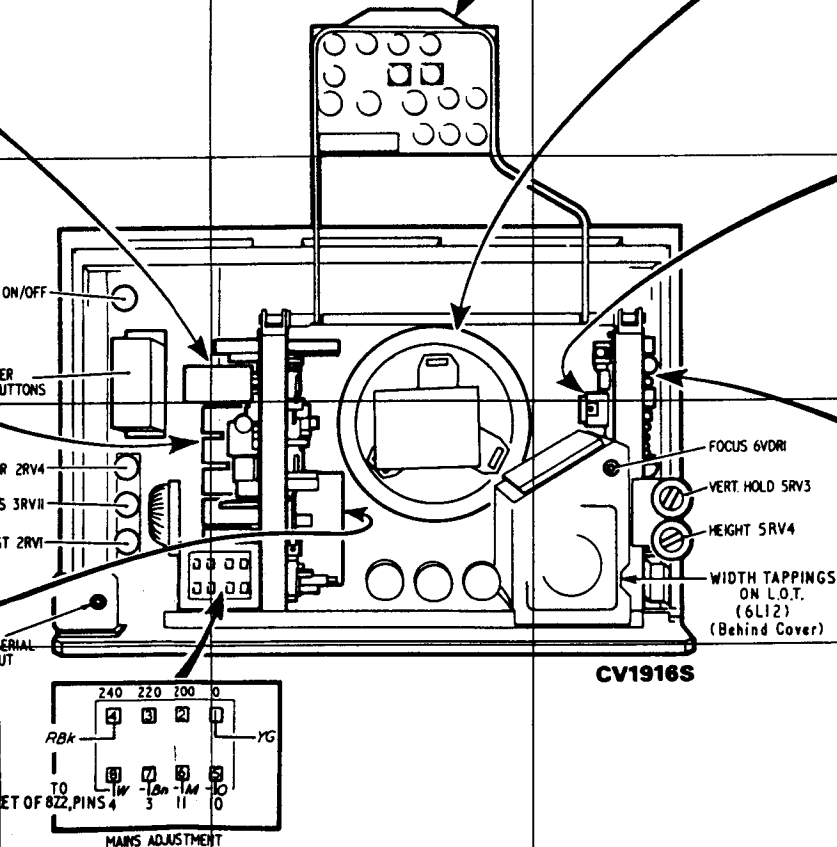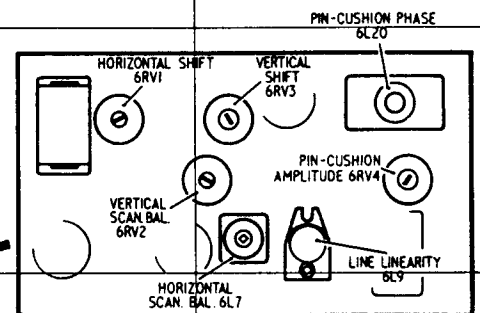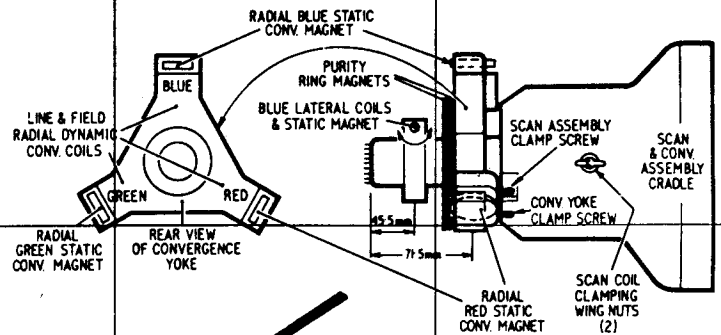

5545

## KEY TO CONTROLS


<b>TRANSFORMER ADJUSTMENT</b>		
Output Transformer	C6	
<b>KEY SCALE CONTROLS</b>		
Brightness, Blue	D1	
Brightness, Green	D1	
Brightness, Red	D1	
Contrast	B5	
Linearity	A5	
Vertical Hold	A5	
Vertical Shift	D2	
<b>CONVERGENCE CONTROLS</b>		
Horizontal Amp.	D1	
Horizontal Shape	D1	
Horizontal Tilt	D1	
General Amp.	F1	
Vertical Amp.	C2	
Vertical Tilt	C1	
Red/Green Vertical Diff.	C2	
Red/Green Vertical Tilt	D2	
Vertical Scan. Bal.	G3	
<b>I.F. &amp; SIGNAL CONTROLS</b>		
Brightness	C5	
Colour	C5	
Contrast	C5	
I.F. Gain	A3	
Tuner A.G.C. Delay	A3	
Tuner Push Buttons	C4	
Volume On/Off	C4	
<b>LINE TIMEBASE &amp; E.H.T. CONTROLS</b>		
Discriminator Balance	G5	
Discriminator Transformer	G5	
Focus	E5	
Horizontal Shift	F3	
Line Frequency	F5	
Height	E5 & F7	
Mid-Point Voltage	G7	
Pin-Cushion Amp.	G3	
Pin-Cushion Phase	G3	
Vertical Hold	E5 & F6	
Vertical Shift	G3	

Height	E5 & F7
Mid-Point Voltage	G7
Pin-Cushion Amp.	G3
Pin-Cushion Phase	G3
Vertical Hold	E5 & F6
Vertical Shift	G3

### DECODER CONTROLS

Burst Output Transformer	A7
Burst Phase Transformer	A6
Delayed Path Gain	A6
Delayed Path Tuning	B6
B-Y Gain	B6
G-Y Gain	A5
R-Y Gain	A5
Gate Pulse Transformer	A7
Quadrature Trimmer	B6
B-Y 2nd Harmonic Rejector	A6

MISC.	R	C
TP20	94 97	
TP21	85 96	
TP22	95 87 89	
D16	98	
D17	56	57
VT14	83 82 84	
VT12	74 73 75	62 61
D19		
D20	77 76 78	63
VT13		
VT16		
VT17		
RV8	99	55
RV9	92 86 90	
RV10	88 79 81	59 58 60
TP23	80 91 93	
TP17		
TP16	100	67 68
TP15	42 44	52 50
RV1		
VT5		
LI5/16	53	
	43	
LI4	103	54
	37 40	28 64
VT18	104	26
RV2	35	27
	101	25
LI3	102	
LI2	33	45
RV6	28	24
RV5	25	
Z1	27 23	
RV4		
T3 T4	36 46	18
LB/9	36	22
LIQ/N	45	19
TC1	34 24	20
	32	23
	17	17
T2		21
D9	105	16
LI7	31 22	
TP5		6
D10	21 26	66
TP2	11	15
VT4	11	14
VT3	5	9
VT1	30	
TP7	10	
	16 53 12	4
D8 T5	32	8
D7	15 19 14	5
TP6	29	
LI8/19/20	13	11 57
RV3	17	12
D6	51	10
DL20		
D12	8 49	
		7 35
D11		34
TP4	3	48 32 36
VT7		
D4 D5	72 50	6
VT11	47	51
TP14	48	
VT10		
TP13	2	33
TP9		
TP12	69 56	45 42
TP3	67	38 3
VT8	59 58	
TC2	57	
D15	66	
D13	60	44
VT6		
L21		47
RV7	68	46
XL1		39
VT9		
TP10	63	1
LI/2	61	43
TI	65	41
TP11	70 71	50

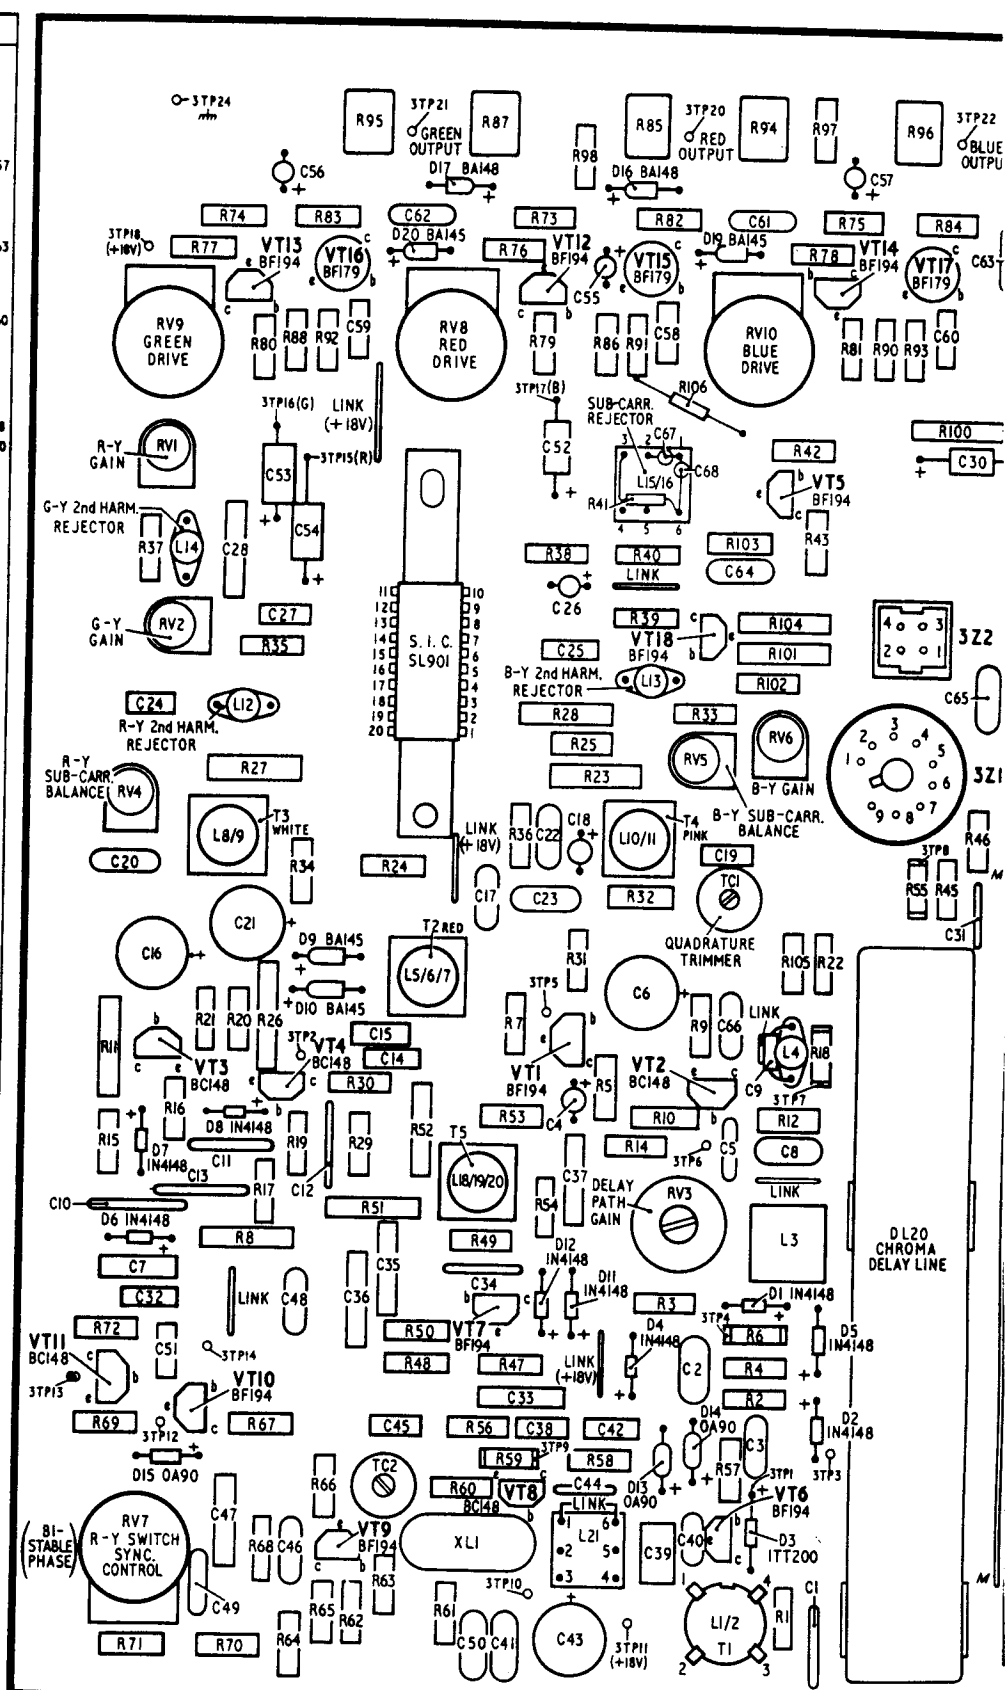

DECODER & R.G.B. DRIVE PANEL Type A807



RANK BUSH MURPHY

# CIRCUIT DESCRIPTION

## U.H.F. Tuner Type Z511

The Z511 is a four section transistorised u.h.f. tuner employing three r.f. transistors in a grounded base mode. Transistors 1VT1 and 1VT2 are used as an r.f. amplifier stage; this stage is followed by 1VT3 operating as a combined mixer and oscillator. An a.g.c. control voltage derived from the Z582 i.f. panel is applied to the base of 1VT1. Four quarter wave coaxial lines 1X2, 4, 8 and 10 are employed as tuned elements for the aerial, r.f., mixer and oscillator respectively. Each of these lines is tuned by a varicap diode (1D1, 2, 3 and 4) with trimming and bandshaping of the r.f. and oscillator stages being carried out by coupling loops. The intermediate frequency signal developed across the output coil 1L10 is passed to the i.f. amplifier on the Z582 via 2Z1. By adjusting the customer push-button channel selector, the voltage applied to the varicap diodes is varied and hence the channel to which the unit is tuned.

## A.F.C. and Power Supply Panel Z512

An i.f. signal from the Z582 is fed via 2Z5 to the base of transistor 1VT4 which acts, with 1L11 and 12, as a narrow band amplifier for 39.5 MHz. The output from this amplifier is fed to the base of 1VT5, the driver for the Foster-Seeley discrimina-

tor 1D5 and 6 etc. The output of the discriminator is zero at 39.5 MHz, but with decreasing frequency pin 6 of the Module *AE* goes positive and pin 7 goes negative. With increasing frequency these polarities are reversed. This resultant automatic frequency control correcting voltage is either added or subtracted, depending on its polarity, to the positive varicap control voltage set by the customer push-buttons, and appears at the wiper of 1RV2 to be fed to pin 4 of the Z511 where it is used to control the channel frequency of the tuner. The diodes 1D7 and 8 have been included to limit the a.f.c. correcting voltage to avoid an excessive pull-in range. The Hold-in Range control 1RV2 is adjusted to give a holding range of  $\pm 1$  MHz at 39.5 MHz. A switch is provided on the customer push-button unit to mute the a.f.c. system whilst tuning.

The integrated circuit 1SIC1, TAA550 stabilises the voltage derived from the +200 V line of the Z584 decoder before feeding it to the varicap push-button control unit. Transistor 1VT6 provides a stabilised supply voltage and bias for the tuner. The base voltage of 1VT6 is held steady by the action of 1SIC1 whilst 1D9 provides compensation for changes of base current due to temperature variation.

# ALIGNMENT PROCEDURE

## 1 Equipment Required

- |  |  |
|--|--|
| 1. 1 External Bias Unit for Z582 . . . . . | (See Fig. 19, Page C-16 of TP1741).                        |
| 1. 2 Oscilloscope . . . . .                | Telequipment S43 or equivalent.                            |
| 1. 3 Multi-range Meter . . . . .           | 20,000 $\Omega$ per volt.                                  |
| 1. 4 Sweep Generator . . . . .             | providing swept i.f. signal 30 to 50MHz.                   |
| 1. 5 Signal Generator, A.M./F.M. . . . .   | covering 30 to 50MHz, modulated 50% at 1000Hz, terminated. |
| 1. 6 Signal Generator, U.H.F. . . . .      | covering 470 to 860MHz amplitude modulated.                |

## 2 Alignment of 1L10 in Z511


- |   |   |
|---|---|
| 2. 1 Inject a swept i.f. signal into i.f. injection point at 1C29 on the side of the tuner Z511, monitor the output at 2TP8 on the Z582 I.F. Panel. |   |
| 2. 2 Adjust 1L10 to position the vision carrier at 50% on the h.f. side of i.f. response (see Fig. 20, Page C-17 of TP1741).                        | and re-check the display, then reduce the signal input level to check for any signs of instability. Disconnect signal generator and oscilloscope. |

## 3 A.F.C. Bandpass Alignment

3. 1 Inject a 39.5MHz f.m. signal, modulated  $\pm 100$ kHz at 1000Hz, using an input level of 2mV, into 2Z5, 1 and 2
3. 2 Set the A.F.C. Switch, 1SW1 to the ON position and set the A.F.C. Hold-in Range control 1RV2 to its mid-position. Monitor the display at pin 6 of the F. M. Detector module (*AE*) on the oscilloscope.
3. 3 Set the core of 1L11 so that it is flush with the top of its former. Align 1L15, 14, 12, and 11 in that order, for maximum amplitude of display. The display will be a symmetrical sinewave with an amplitude of approx. 0.2V pk-pk.
3. 4 Change the signal generator from frequency to amplitude modulation and set the modulation depth to 50%. Adjust 1L15 only for minimum display amplitude. Revert to frequency modulation

## 4 A.F.C. Hold-in Range Check

4. 1 Connect the external bias unit (See Item 1.1) to the i.f. unit at 2TP3, 4 and 5. Switch the A.F.C. Switch to the OFF position and set the R.F. Gain control 1RV3 fully anti-clockwise.
4. 2 Inject into the u.h.f. aerial socket, a signal of 600MHz, amplitude modulated 50% at 1000Hz at a level of not less than 1mV. Tune one of the unit push-buttons to this signal, monitoring the output at 2TP8 on the oscilloscope. Adjust the external bias unit to produce a display amplitude of 2V pk-pk.
4. 3 Check that the i.f. produced is 39.5MHz by injecting a 39.5MHz into 2TP1 on the Z582 via a 1pF capacitor and observing any beat pattern on the display.
4. 4 Change the input signal frequency to 599MHz. Set 1RV2 fully anti-clockwise and 1SW1 to ON. Rotate 1RV2 slowly clockwise to a point where the display regains its undistorted amplitude of 2V pk-pk.

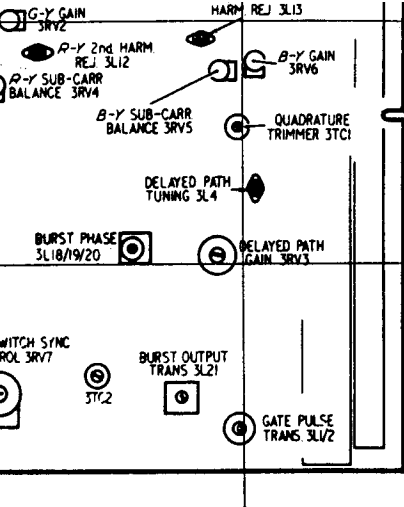

MAINS ADJUSTMENT

Mains Transformer ..... C6

GREY SCALE CONTROLS

a' Voltage, Blue ..... D1

a' Voltage, Green ..... D1

a' Voltage, Red ..... D1

Blue Drive ..... B5

Green Drive ..... A5

Red Drive ..... A5

Gun Switches ..... D2

CONVERGENCE CONTROLS

Blue Horizontal Amp. .... D1

Blue Horizontal Shape ..... D1

Blue Horizontal Tilt ..... D1

Blue Lateral Amp. .... D1

Blue Lateral Coils ..... F1

Blue Vertical Amp. .... C2

Blue Vertical Tilt ..... C1

Horizontal Scan, Bal. .... G3

Purity Ring Magnets ..... G1

Radial Static Conv. Magnets ..... F1

Red/Green Horizontal Amp. .... D1

Red/Green Horizontal Diff. .... D1

Red/Green Horizontal Tilt ..... D1

Red/Green Vertical Amp. .... C1

Red/Green Vertical Diff. .... C2

Red/Green Vertical Tilt ..... D2

Vertical Scan, Bal. .... G3

I.F. & SIGNAL CONTROLS

Brightness ..... C5

Colour ..... C5

Contrast ..... C5

I.F. Gain ..... A3

Tuner A.G.C. Delay ..... A3

Tuner Push Buttons ..... C4

Volume On/Off ..... C4

LINE TIMEBASE & E.H.T. CONTROLS

Discriminator Balance ..... G5

Discriminator Transformer ..... G5

Focus ..... E5

Horizontal Shift ..... F3

Line Frequency ..... F5

Line Linearity ..... G3

Over Volts Protection ..... G5

Set E.H.T. .... B2

Width Tappings ..... E5

FIELD CONTROLS

Field Linearity ..... F7

Height ..... E5 & F7

Mid-Point Voltage ..... G7

Pin-Cushion Amp. .... G3

Pin-Cushion Phase ..... G3

Vertical Hold ..... E5 & F6

Vertical Shift ..... G3

DECODER CONTROLS

Burst Output Transformer ..... A7

Burst Phase Transformer ..... A6

Delayed Path Gain ..... A6

Delayed Path Tuning ..... B6

B-Y Gain ..... B6

G-Y Gain ..... A5

R-Y Gain ..... A5

Gate Pulse Transformer ..... A7

Quadrature Trimmer ..... B6

B-Y 2nd Harmonic Rejector ..... A6

G-Y 2nd Harmonic Rejector ..... A5

R-Y 2nd Harmonic Rejector ..... A6


B-Y Sub-Carrier Balance ..... A6

R-Y Sub-Carrier Balance ..... A6

Sub-Carrier Rejector ..... A5

R-Y Switch Sync. Control ..... A7

3TC2 ..... A7

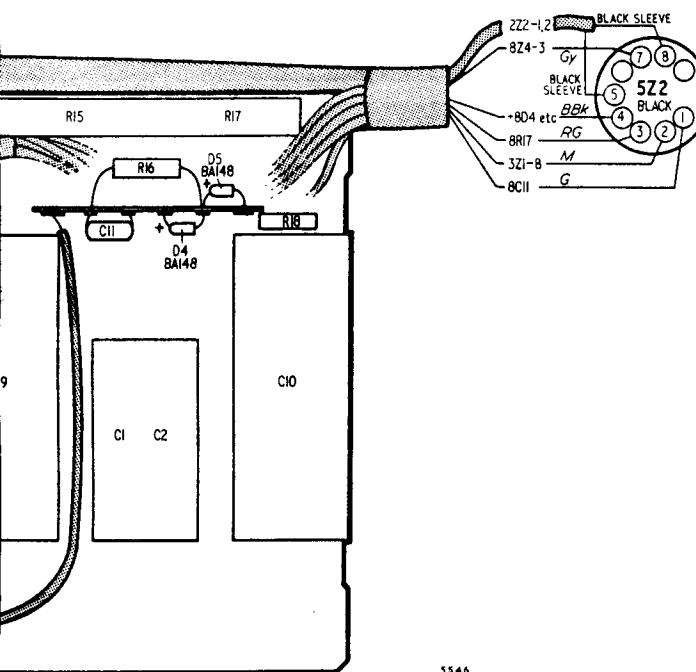

MISC.	R	C
Z3	02	2
SG9	SG1	3
Z1	SG3	13
VT2	17	5
D1	VI	4
SG8	SG6	16
VT1	15	9
SG7	SG5	10
SG6	SG4	7
SG5	SG3	1
SG4	SG2	14
SG3	SG1	11
SG2	SG0	8
SG1	SG-1	6
SG0	SG-2	4
SG-1	SG-3	3
SG-2	SG-4	2
SG-3	SG-5	1
SG-4	SG-6	0
SG-5	SG-7	0
SG-6	SG-8	0
SG-7	SG-9	0
SG-8	SG-10	0
SG-9	SG-11	0
SG-10	SG-12	0
SG-11	SG-13	0
SG-12	SG-14	0
SG-13	SG-15	0
SG-14	SG-16	0
SG-15	SG-17	0
SG-16	SG-18	0
SG-17	SG-19	0
SG-18	SG-20	0
SG-19	SG-21	0
SG-20	SG-22	0
SG-21	SG-23	0
SG-22	SG-24	0
SG-23	SG-25	0
SG-24	SG-26	0
SG-25	SG-27	0
SG-26	SG-28	0
SG-27	SG-29	0
SG-28	SG-30	0
SG-29	SG-31	0
SG-30	SG-32	0
SG-31	SG-33	0
SG-32	SG-34	0
SG-33	SG-35	0
SG-34	SG-36	0
SG-35	SG-37	0
SG-36	SG-38	0
SG-37	SG-39	0
SG-38	SG-40	0
SG-39	SG-41	0
SG-40	SG-42	0
SG-41	SG-43	0
SG-42	SG-44	0
SG-43	SG-45	0
SG-44	SG-46	0
SG-45	SG-47	0
SG-46	SG-48	0
SG-47	SG-49	0
SG-48	SG-50	0
SG-49	SG-51	0
SG-50	SG-52	0
SG-51	SG-53	0
SG-52	SG-54	0
SG-53	SG-55	0
SG-54	SG-56	0
SG-55	SG-57	0
SG-56	SG-58	0
SG-57	SG-59	0
SG-58	SG-60	0
SG-59	SG-61	0
SG-60	SG-62	0
SG-61	SG-63	0
SG-62	SG-64	0
SG-63	SG-65	0
SG-64	SG-66	0
SG-65	SG-67	0
SG-66	SG-68	0
SG-67	SG-69	0
SG-68	SG-70	0
SG-69	SG-71	0
SG-70	SG-72	0
SG-71	SG-73	0
SG-72	SG-74	0
SG-73	SG-75	0
SG-74	SG-76	0
SG-75	SG-77	0
SG-76	SG-78	0
SG-77	SG-79	0
SG-78	SG-80	0
SG-79	SG-81	0
SG-80	SG-82	0
SG-81	SG-83	0
SG-82	SG-84	0
SG-83	SG-85	0
SG-84	SG-86	0
SG-85	SG-87	0
SG-86	SG-88	0
SG-87	SG-89	0
SG-88	SG-90	0
SG-89	SG-91	0
SG-90	SG-92	0
SG-91	SG-93	0
SG-92	SG-94	0
SG-93	SG-95	0
SG-94	SG-96	0
SG-95	SG-97	0
SG-96	SG-98	0
SG-97	SG-99	0
SG-98	SG-100	0
SG-99	SG-101	0
SG-100	SG-102	0
SG-101	SG-103	0
SG-102	SG-104	0
SG-103	SG-105	0
SG-104	SG-106	0
SG-105	SG-107	0
SG-106	SG-108	0
SG-107	SG-109	0
SG-108	SG-110	0
SG-109	SG-111	0
SG-110	SG-112	0
SG-111	SG-113	0
SG-112	SG-114	0
SG-113	SG-115	0
SG-114	SG-116	0
SG-115	SG-117	0
SG-116	SG-118	0
SG-117	SG-119	0
SG-118	SG-120	0
SG-119	SG-121	0
SG-120	SG-122	0
SG-121	SG-123	0
SG-122	SG-124	0
SG-123	SG-125	0
SG-124	SG-126	0
SG-125	SG-127	0
SG-126	SG-128	0
SG-127	SG-129	0
SG-128	SG-130	0
SG-129	SG-131	0
SG-130	SG-132	0
SG-131	SG-133	0
SG-132	SG-134	0
SG-133	SG-135	0
SG-134	SG-136	0
SG-135	SG-137	0
SG-136	SG-138	0
SG-137	SG-139	0
SG-138	SG-140	0
SG-139	SG-141	0
SG-140	SG-142	0
SG-141	SG-143	0
SG-142	SG-144	0
SG-143	SG-145	0
SG-144	SG-146	0
SG-145	SG-147	0
SG-146	SG-148	0
SG-147	SG-149	0
SG-148	SG-150	0
SG-149	SG-151	0
SG-150	SG-152	0
SG-151	SG-153	0
SG-152	SG-154	0
SG-153	SG-155	0
SG-154	SG-156	0
SG-155	SG-157	0
SG-156	SG-158	0
SG-157	SG-159	0
SG-158	SG-160	0

CV1916S

(Behind Cover)

## CONTROLS

Vertical Diff.	C2	Height	E5 & F7
Vertical Tilt	D2	Mid-Point Voltage	G7
I. Bal.	G3	Pin-Cushion Amp.	G3
		Pin-Cushion Phase	G3
		Vertical Hold	E5 & F6
		Vertical Shift	G3

## SIGNAL CONTROLS


	C5		
	C5		
	C5		
	A3		
Delay	A3		
Buttons	C4		
ff	C4		

## E TIMEBASE &amp; T. CONTROLS


Balance	G5		
Transformer	G5		
	E5		
Shift	F3		
cy	F5		
y	G3		
tection	G5		
	B2		
ngs	E5		

## LD CONTROLS

ty	F7		
----	----	--	--

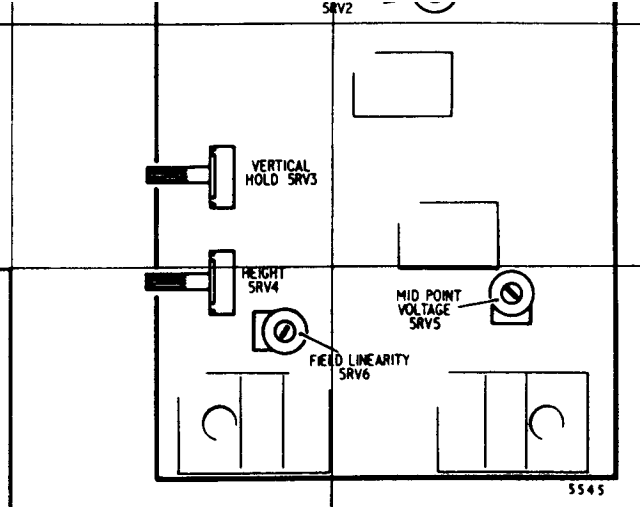

R	C
	2
1	11
3	
5	
13	
17	
4	
16	9
15	6
10	7
2	14

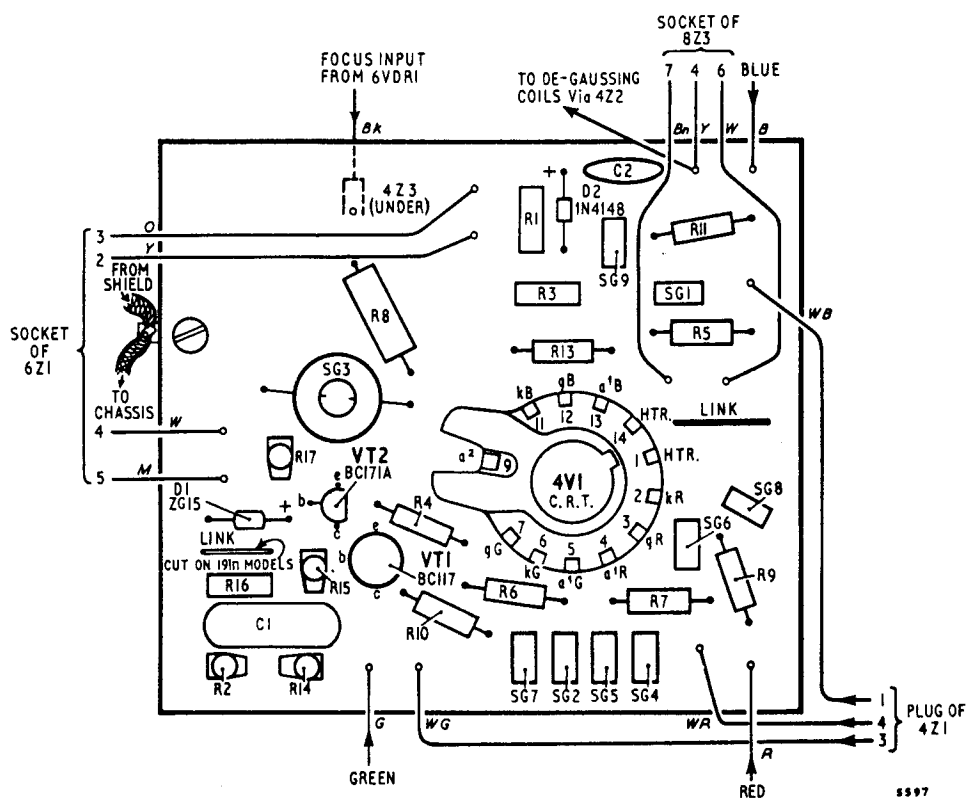

C.T. BASE PANEL


MISC	R	C
Z3	35	25
VT7 L1/2		8
	34 33	
VT6		39
	32	5
	22	9 7
D6		23
D3		
VT2	7	17
D2	30	3
	23	
	14	
D1		12
	5	18
L3M		20 13
RV1	31	15
		2
VT5		1
D5	17	
TP1 TP3	16	
	28	
	10	
	15	
RV2	29	3
	20	21
	22	
D4		12
VT1		19
N1	19	4
TP4 TP2	28	
	27	
VT4		16
VT3	24	
Z2	21	4
	25	6
		14
		11
D12		
		28
D7	6	24
		38
D11		40
RV3		
D10		29
	43	
	46	
THY1		39 37
	44	32
	39	41
VT9		37
	42	45
		38
		31
		35
	48	
VT10		
RV4 D8		
RV5 D9		30
		33
RV6	52	
	56	
	51	
	49	
	54	
TH1	50	53
		34
VT11		
VT12		

THY1 B  
SILICON  
SWI  
1. Catho  
2. Catho  
3. Anod  
4. Anod

SCAN DRIVE P



MISC	R	C
Z3	35	25
VT7 LU/2		8
	34 33	
VT6		39
	32	5
D6	23	7
D5		
VT2	7	17
D2	30	3
D1	23 14 13	12
L3/4	5	18 20 13
RV1	31	15
VT5	2	1
D5	17	
TP1	16	
TP3	28	10
	18	
RV2	29	3
	20	21
D4	12	19
VT1	19	4
NI		
TP4	28	
TP2	27	
VT4		16
VT3	24	
Z2	21	4
Z5	25	6
D12		14
	11	
D7		28
	6	24
D11	38	
Z1		
RV3	40	
D10		
THY1	29	
	39 37	
	41 32	
VT9	47 57	
	42 38	
	45 36	
	31 35	
	48	
VT10		
RV4	D8	
RV5	D9	
	30	33
RV6	52	
	56 51	
	49	
	54	
TH1	50 55	53
		34
VT11		
VT12		


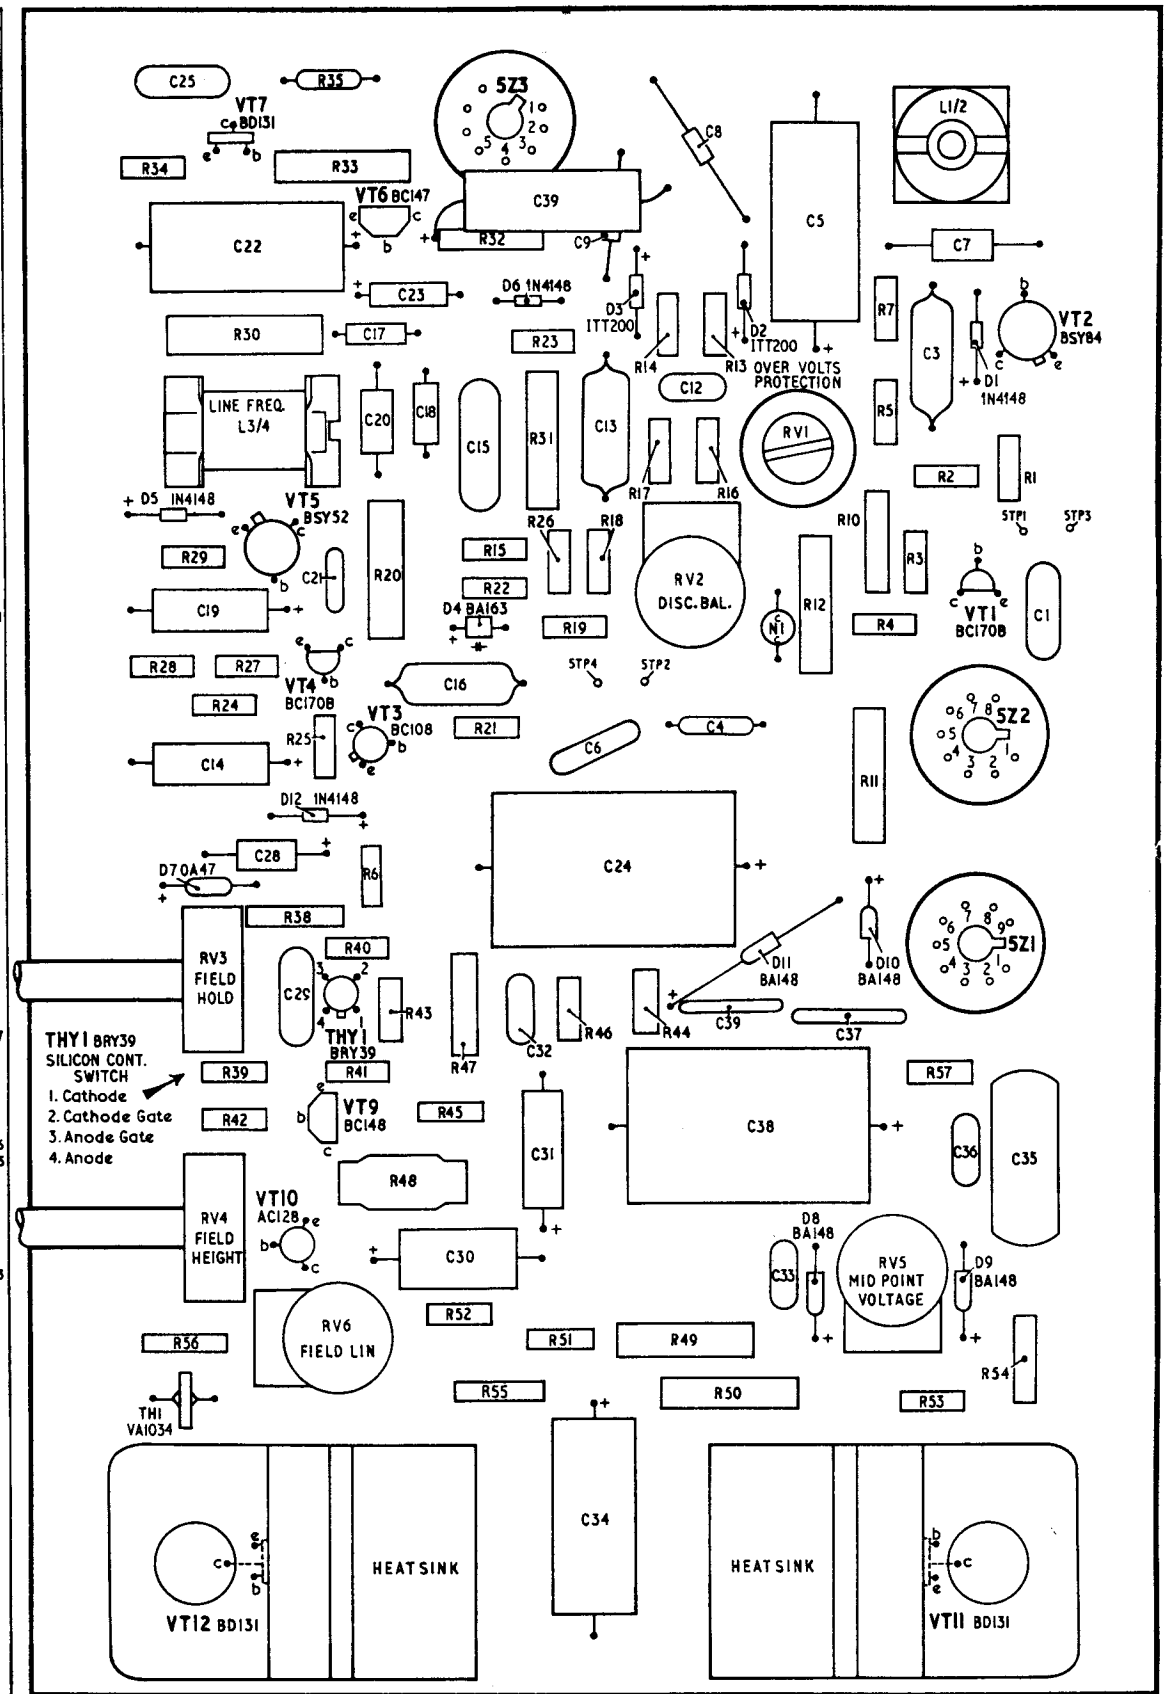


SCAN DRIVE PANEL Type A803

# VOLTAGES

These voltages were obtained using a typical receiver under average signal conditions on a mains input of 240V a.c. A 20,000 ohms/volt meter was used with a suitable adaptor for measuring the E.H.T. and Focusing potential. All voltages are positive with respect to chassis unless otherwise stated. N.T. indicates no test.

Ref.	Type	Electrode Voltage			Remarks
		emitter	base	collector	
1VT1	BF180	N.T.	N.T.	N.T.	
1VT2	BF171	N.T.	N.T.	N.T.	
2VT1	BF196	3.3	4.0	7.3	
2VT2	BF194	11.0	11.5	18.0	
2VT3	BF197	3.9	4.5	10.0	
2VT4	BF197	8.1	7.0	15.0	
2VT5	BC148	4.0	4.5	15.5	Depends on setting of 2RV2
2VT6	BC158	19.0	18.5	7.5	Depends on setting of 2RV3
2VT7	BC148	3.6	2.5	8.0	
2VT8	BC196	7.0	8.0	15.0	
2VT9	BF197	2.5	3.2	16.5	
2VT10	BC148	1.0	1.6	6.5	
2VT11	BC148	6.0	6.5	17.0	
2VT12	BC153	1.2	3.0	12.2	
2VT13	BC113	0.7	1.2	12.5	
2VT14	BC107	—	0.7	12.5	
2VT15	AC176	12.6	13.0	25.0	
2VT16	AC128	12.6	12.5	—	
3VT1	BF194	—	0.5	0.1	
3VT2	BC148	1.9	2.1	17.0	Depends on setting of 3RV3
3VT3	BC148	—	0.5	6.0	Colour on
		—	0	12.0	Colour off
3VT4	BC148	—	0.5	6.0	Colour on
		—	0.8	0.5	Colour off
3VT5	BF194	5.1	5.6	18.0	
3VT6	BF194	2.2	3.0	18.0	
3VT7	BF194	0	-3.6	-2.1	
3VT8	BC148	0	0	18.0	
3VT9	BF194	0.6	0.9	10.0	Colour on
		1.5	2.1	10.0	Colour off
3VT10	BF194	2.8	3.0	18.0	
3VT11	BC158	18.0	17.2	17.3	Colour on
		18.0	17.4	0.6	Colour off
3VT12	BF194	2.0	2.5	18.0	Bright. max.
		1.4	2.0	18.0	Bright. min.
3VT13	BF194	2.0	2.5	18.0	Bright. max.
		1.4	2.0	18.0	Bright. min.
3VT14	BF194	2.0	2.5	18.0	Bright. max.
		1.4	2.0	18.0	Bright. min.
3VT15	BF179	1.5	2.0	100	Bright. max.
		0.8	1.7	125	Bright. min.
3VT16	BF179	1.5	2.0	100	Bright. max.
		0.8	1.7	125	Bright. min.
3VT17	BF179	1.5	2.0	100	Bright. max.
3VT17	BF179	0.8	1.7	125	Bright. min.
3VT18	BF194	0.25	0.3	16.0	
8VT1	BC147	-0.2	-1.5	10.0	
		<b>Cathode</b>	<b>Anode</b>	<b>Gate</b>	
8THY1	BT106	N.T.	N.T.	N.T.	

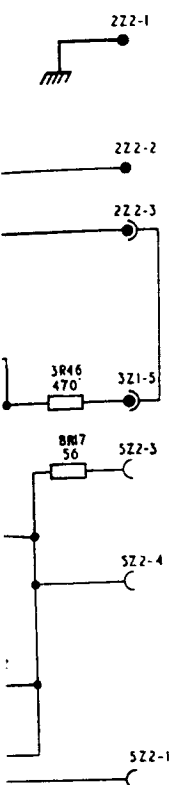

# VOLTAGES

These voltages were obtained using a typical receiver under conditions on a mains input of 240V a.c. A 20,000 ohms/volt n suitable adaptor for measuring the E.H.T. and Focusing p are positive with respect to chassis unless otherwise stated

Ref.	Type	Electrode Voltage			Remark
		emitter	base	collector	
1VT1	BF180	N.T.	N.T.	N.T.	
1VT2	BF171	N.T.	N.T.	N.T.	
2VT1	BF196	3.3	4.0	7.3	
2VT2	BF194	11.0	11.5	18.0	
2VT3	BF197	3.9	4.5	10.0	
2VT4	BF197	8.1	7.0	15.0	
2VT5	BC148	4.0	4.5	15.5	Depend
2VT6	BC158	19.0	18.5	7.5	Depend
2VT7	BC148	3.6	2.5	8.0	
2VT8	BC196	7.0	8.0	15.0	
2VT9	BF197	2.5	3.2	16.5	
2VT10	BC148	1.0	1.6	6.5	
2VT11	BC148	6.0	6.5	17.0	
2VT12	BC153	1.2	3.0	12.2	
2VT13	BC113	0.7	1.2	12.5	
2VT14	BC107	—	0.7	12.5	
2VT15	AC176	12.6	13.0	25.0	
2VT16	AC128	12.6	12.5	—	
3VT1	BF194	—	0.5	0.1	
3VT2	BC148	1.9	2.1	17.0	Depend
3VT3	BC148	—	0.5	6.0	Colour
		—	0	12.0	Colour
3VT4	BC148	—	0.5	6.0	Colour
		—	0.8	0.5	Colour
3VT5	BF194	5.1	5.6	18.0	
3VT6	BF194	2.2	3.0	18.0	
3VT7	BF194	0	-3.6	-2.1	
3VT8	BC148	0	0	18.0	
3VT9	BF194	0.6	0.9	10.0	Colour
		1.5	2.1	10.0	Colour
3VT10	BF194	2.8	3.0	18.0	
3VT11	BC158	18.0	17.2	17.3	Colour
		18.0	17.4	0.6	Colour
3VT12	BF194	2.0	2.5	18.0	Bright.
		1.4	2.0	18.0	Bright.
3VT13	BF194	2.0	2.5	18.0	Bright.
		1.4	2.0	18.0	Bright.
3VT14	BF194	2.0	2.5	18.0	Bright.
		1.4	2.0	18.0	Bright.
3VT15	BF179	1.5	2.0	100	Bright.
		0.8	1.7	125	Bright.
3VT16	BF179	1.5	2.0	100	Bright.
		0.8	1.7	125	Bright.
3VT17	BF179	1.5	2.0	100	Bright.
3VT17	BF179	0.8	1.7	125	Bright.
3VT18	BF194	0.25	0.3	16.0	
8VT1	BC147	-0.2	-1.5	10.0	
8THY1	BT106	Cathode	Anode	Gate	
		N.T.	N.T.	N.T.	



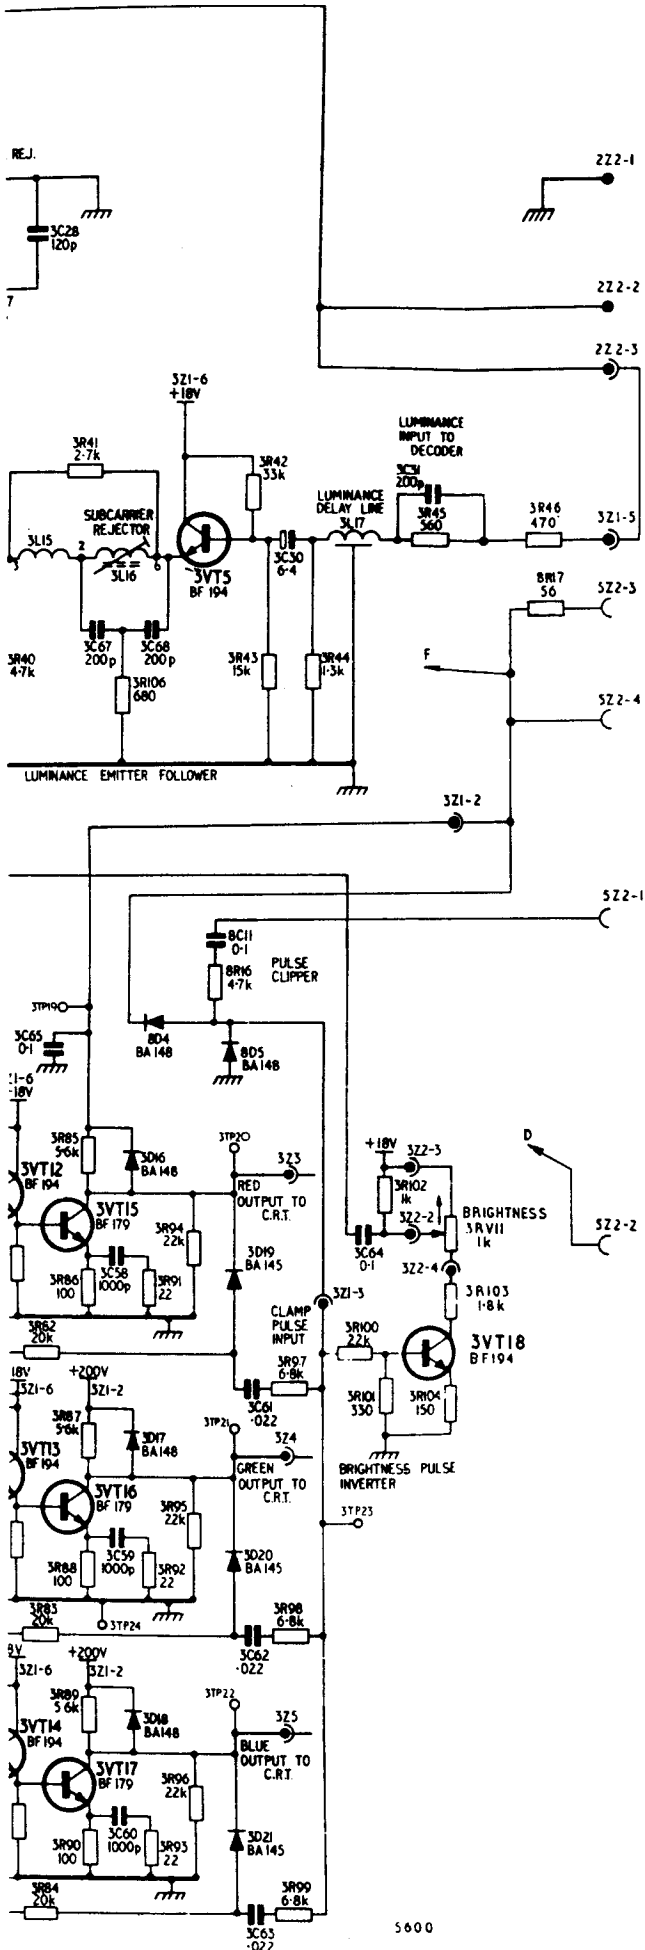


TABLE & REF SUBCARRIER SWITCH



TUNER, I.F., SOUND AND COLOUR CIRCUITS DIAGRAM

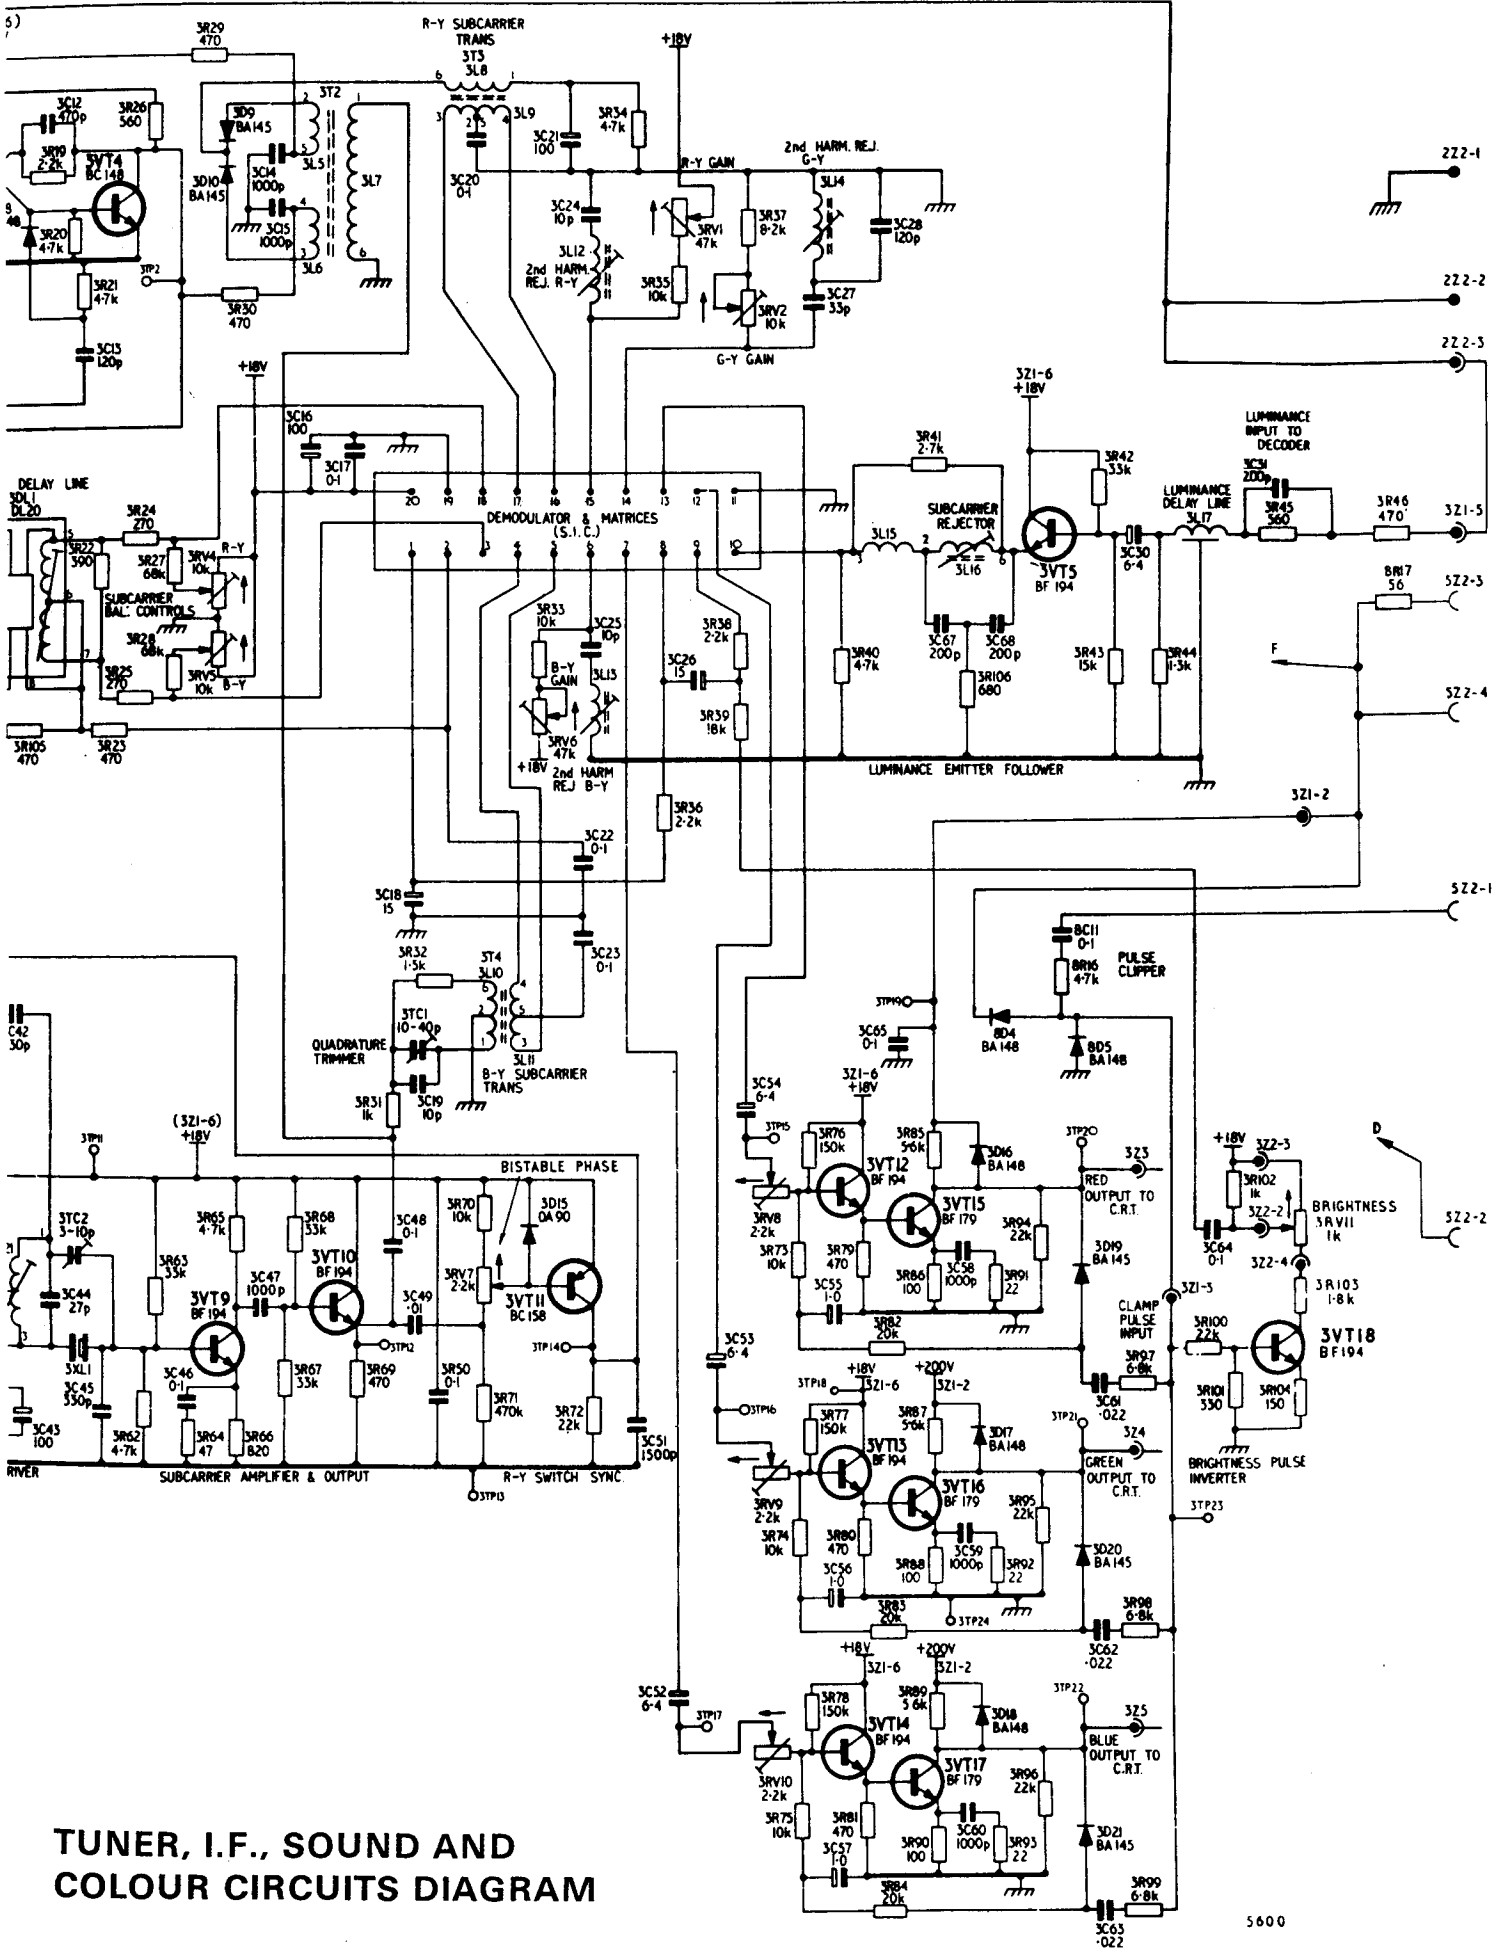

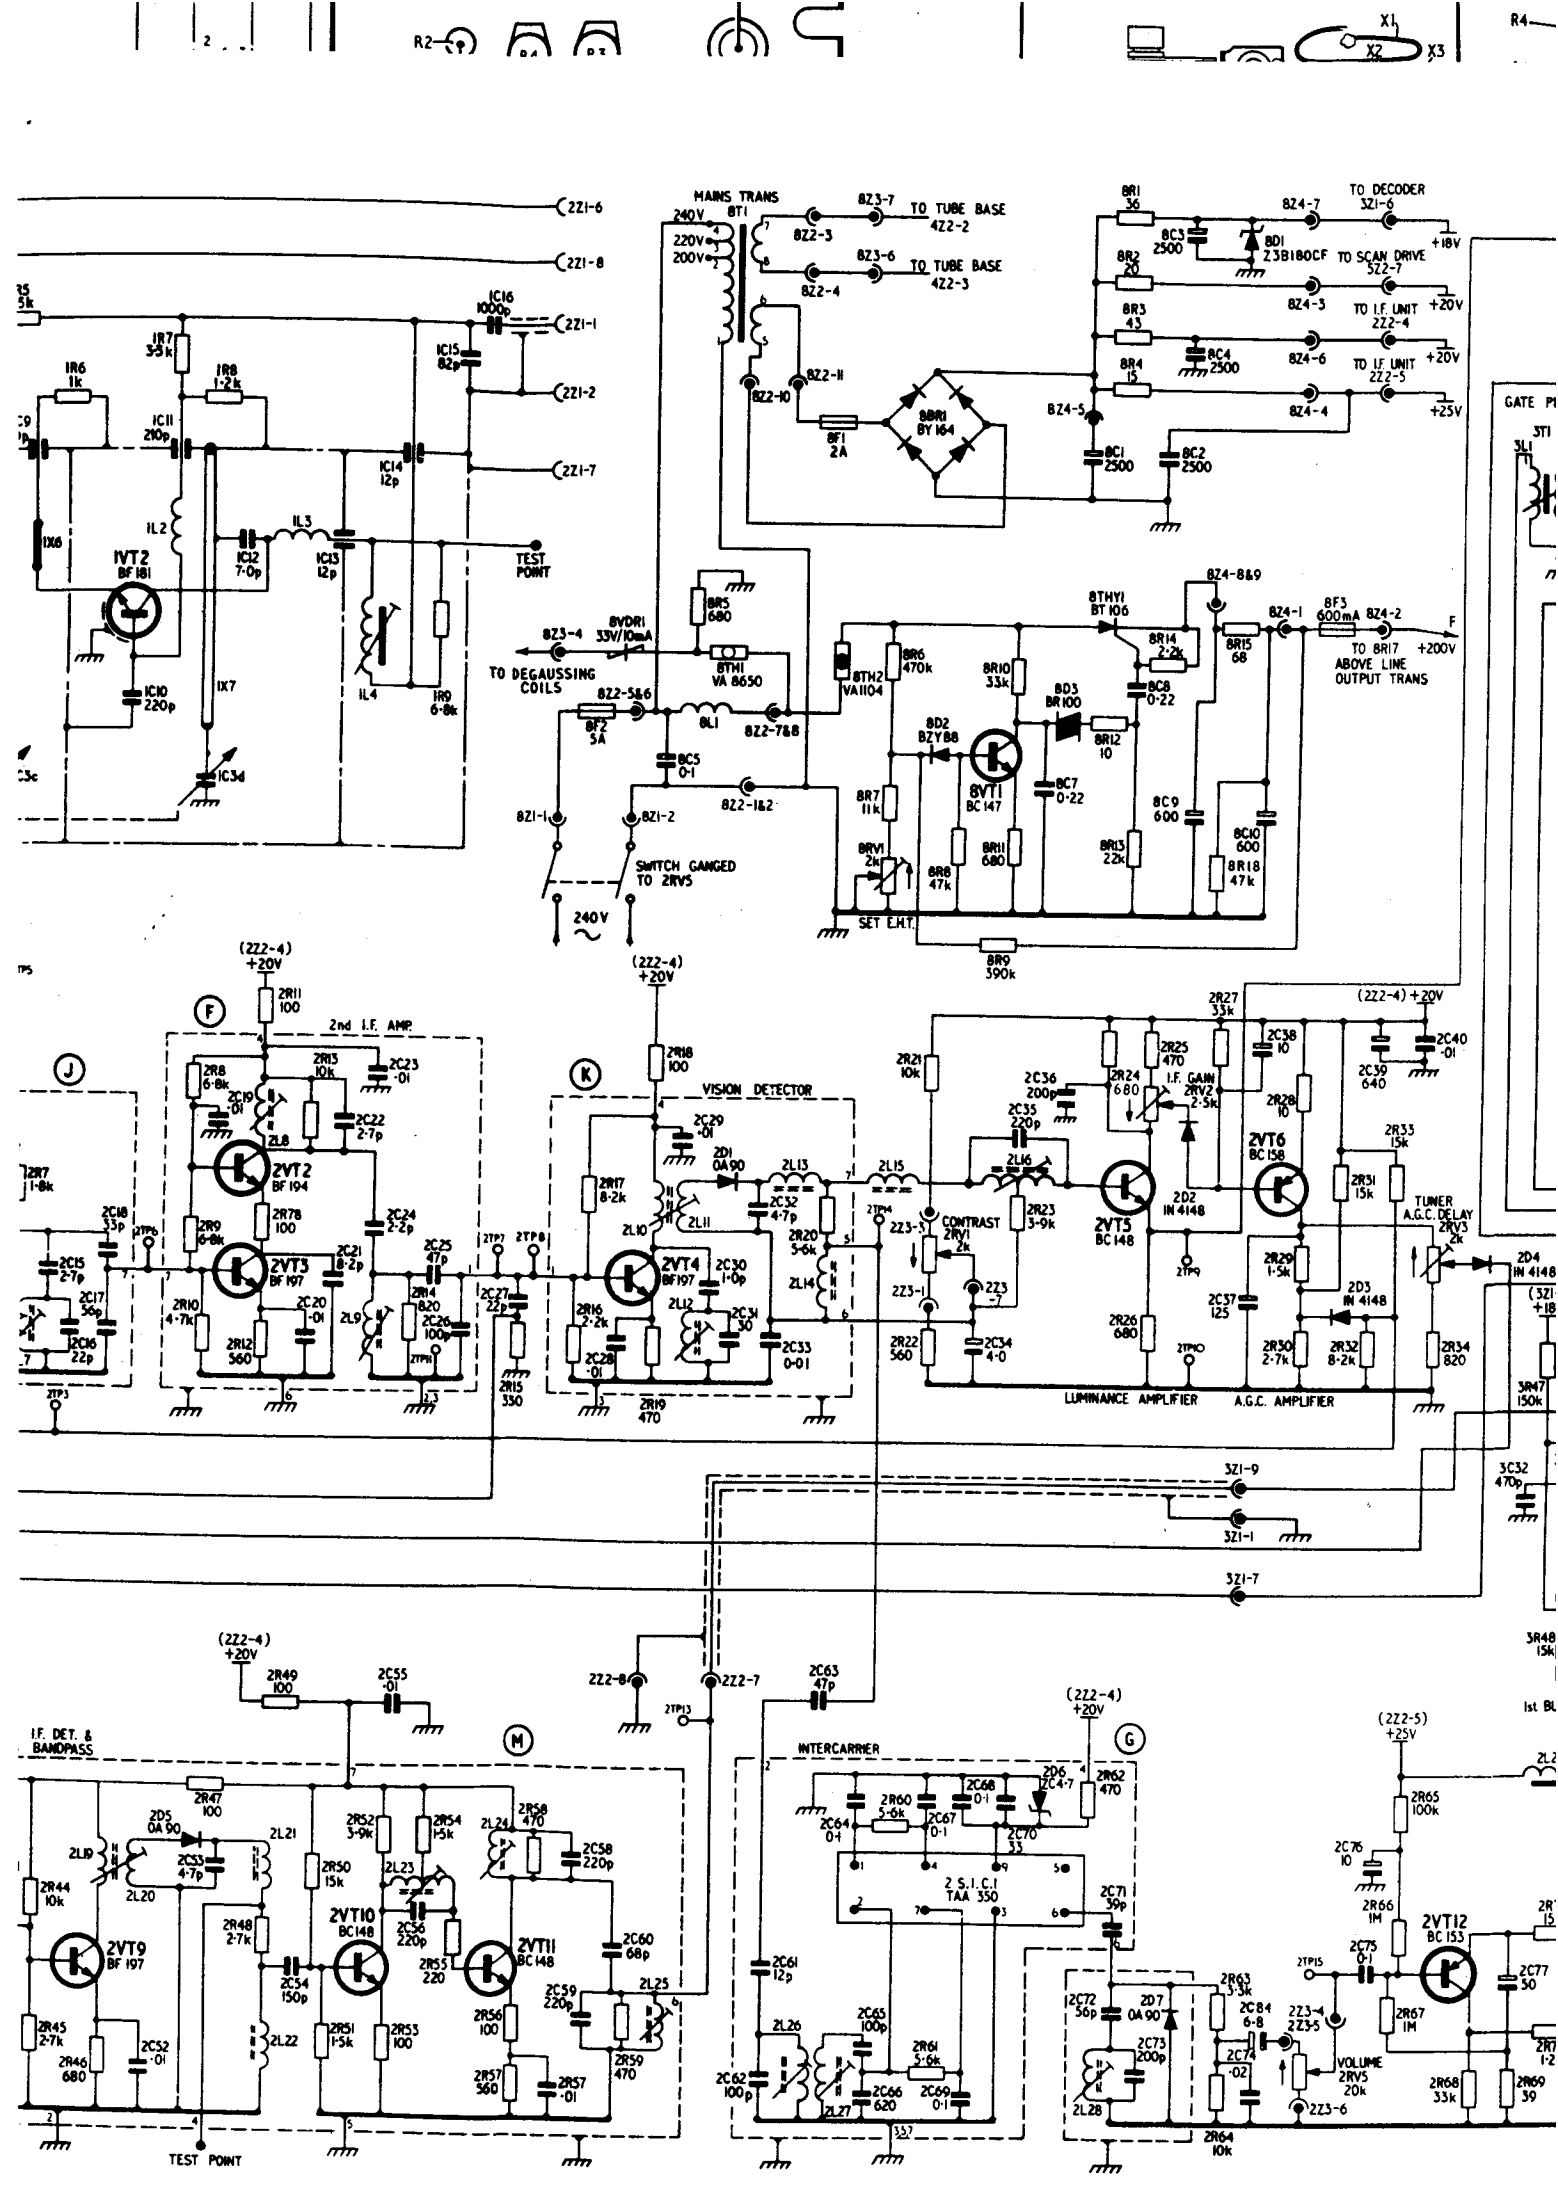

### 5 Stabilising Voltage Check

5. 1 Check that 1S1C1 (TAA550) is stabilising the voltage at 1Z3 pin 8 at 33V,  $\pm 1$ V. Check that the supply to pin 3 of the Z511 is 12V,  $\pm 1$ V.

### 6 Tuning Range

6. 1 With the u.h.f. signal generator connected to the tuner aerial socket, and the A.F.C. Switch 1SW1 in the OFF position, check that the frequency coverage of the tuner is at least 470.75MHz to 853.75MHz. The signal should be

amplitude modulated 50% at 1000Hz and the output monitored on the Z582 at 2TP8, with the oscilloscope. After completing this check disconnect the signal generator and oscilloscope.

### 7 R.F. Gain Control, 1RV3, Setting

7. 1 With no signal input applied, monitor the voltage at Pin 1 of the tuner unit Z511 with the meter, Item 1. 3, set to its 10V range. Adjust 1RV3 to produce 2.8V at this point.

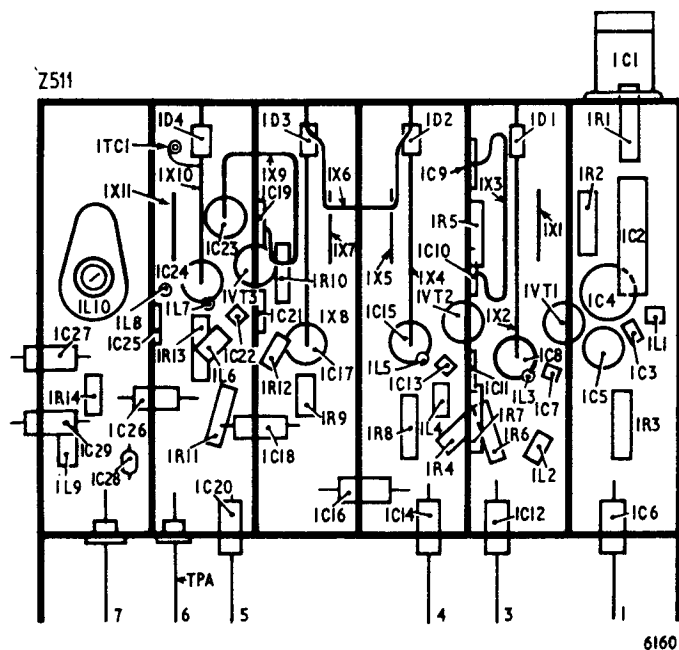


Fig. 1 Component Layout, Tuner type Z511

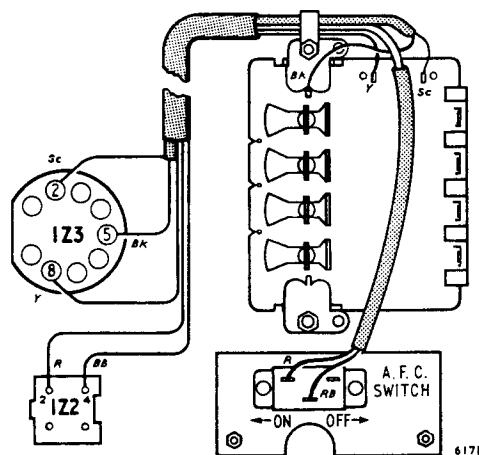


Fig. 2 Customer Control Unit Interconnection Diagram

## ADJUSTMENT PROCEDURE

The adjustment procedure for the Z584 decoder is identical to that for the Z180 decoder, as printed TP1741 Service Information, apart from Sections 23 to 26, Identity Control (Final Adjustment). These adjustments should be now made as follows:

### 1 Reference Levels

1. 1 Inject a colour bar signal at the aerial socket and monitor the output on the oscilloscope at 3TP7. Adjust the Pre-set Colour control 2RV6 on the Z582 panel to provide 600mV, pk-pk of U reference output at 3TP7.
1. 2 Transfer the oscilloscope to 3TP1 and adjust the Burst Gain control 3RV2 for 450mV pk-pk of the red colour bar at 3TP1.
1. 3 Recheck operations 1. 1 and 1. 2 above to achieve the figures quoted.


### 2 Identity Adjustment

2. 1 Connect a 10k $\Omega$  resistor (preferably  $\pm 1\%$  tolerance) between 3TP8 and the wiper of the Identity control 3RV4. Turn the Identity control 3RV4 fully clockwise.

2. 2 De-couple the bi-stable trigger pulse momentarily by connecting a 10 $\mu$ F capacitor between the link to pin 5 of the SL917A and chassis (3TP4) and then removing it, until the circuit goes into the 'reverse ident' condition (low saturation, reverse phase colours).
2. 3 Rotate the Identity control slowly anti-clockwise until correct ident just occurs.
2. 4 Interrupt the bi-stable trigger pulse 15 to 20 times (See 2. 2 above) to ensure that reverse ident does not occur after interruption of pulse. If it does, rotate 3RV4 a few degrees further anti-clockwise, and repeat.


### 3 Colour Killer Check

3. 1 Remove the 10k $\Omega$  resistor and insert a 27k $\Omega$   $\pm 1\%$  resistor between 3TP8 and chassis (3TP4).
3. 2 Change channels by depressing a tuner push-button and ensure that the display does not 'colour kill', if it does repeat section 2 above.

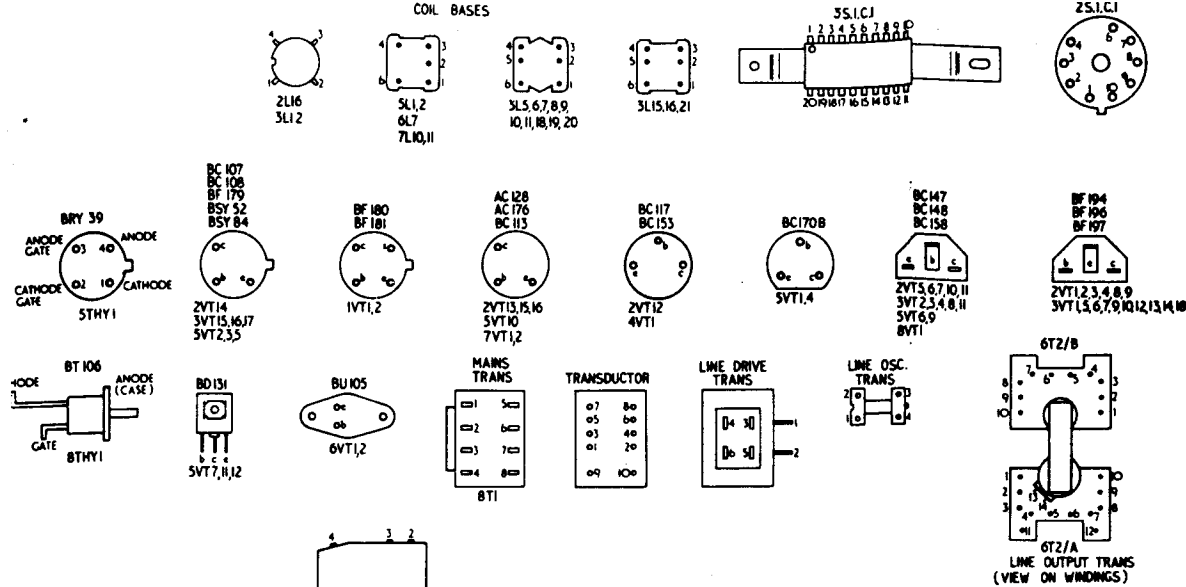

Ref.	Type
4VT1	BC117
4VT2	BC171
5VT1	BC170B
5VT2	BSY84
5VT3	BC108
5VT4	BC170B
5VT6	BC147
5VT7	BD131
5VT8	
5VT9	BC148
5VT10	AC128
5VT11	BD131
5VT12	BD131
6VT1	BU105
6VT2	BU105
7VT1	AC128
7VT2	AC128

Ref.	Pin No.
5THY1	BRY39
4V1	1
	2
	3
	4
	5
	6
	7
	8
	9
	10
	11
	12
	13
	14

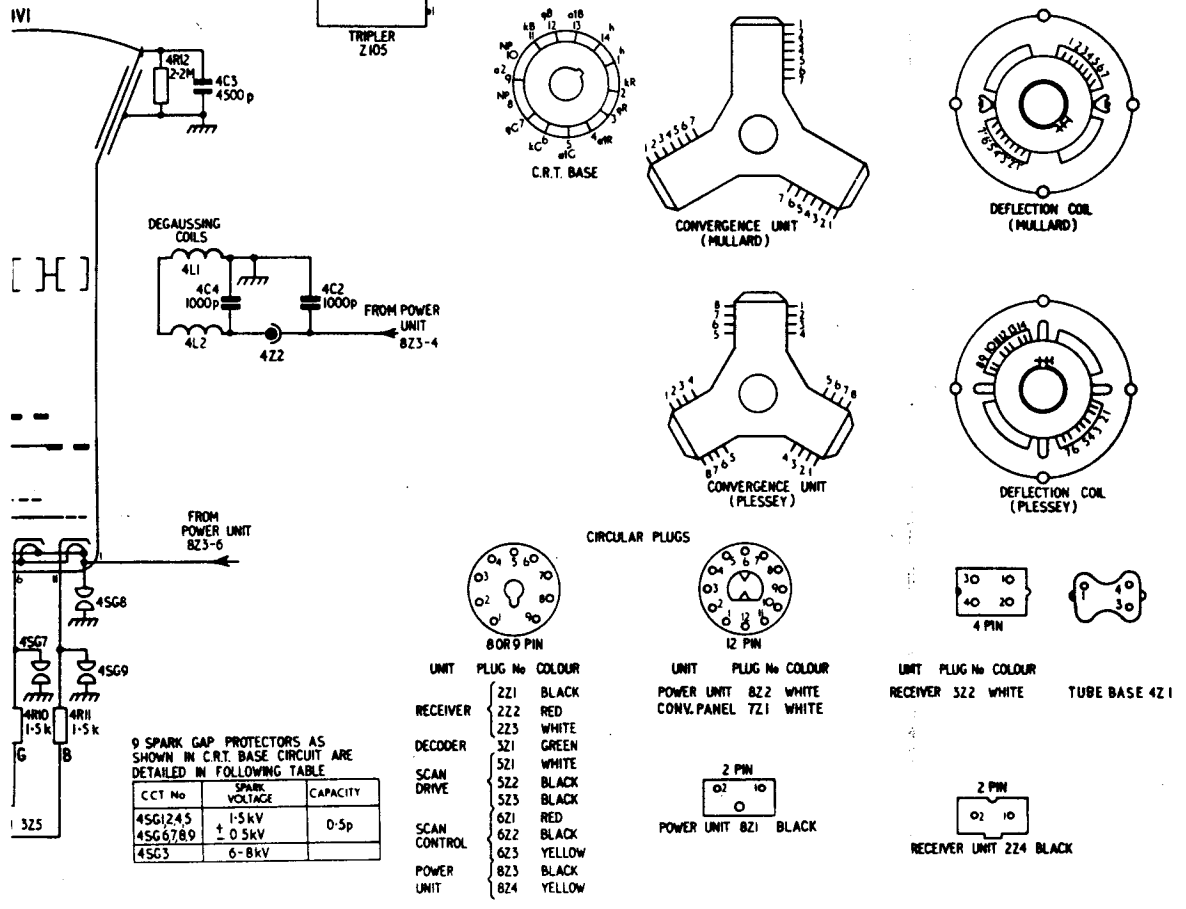

CONVERGENCE COILS	MULLARD	PLESSEY
CONVERGENCE	4, 5	7, 8
LINE R.G.B	6, 7	5, 6
LINE R.G.B	3	1, 2
FIELD R.G.B	2	3, 4

SCAN COILS	MULLARD	PLESSEY
LINE	1, 2	6, 14
LINE	1, 2	7, 13
FIELD	6, 3	1, 11
FIELD	3, 6	4, 8






INDICATES CLOCKWISE ROTATION OF VARIABLE RESISTORS

KEY TO PLUGS & TRANSISTORS VIEWED ON PINS COILS VIEWED ON WINDINGS

RESISTOR VALUES IN Ω CAPACITOR VALUES IN μF UNLESS OTHERWISE STATED

# TIMEBASE, E.H.T. & CONVERGENCE CIRCUITS DIAGRAM



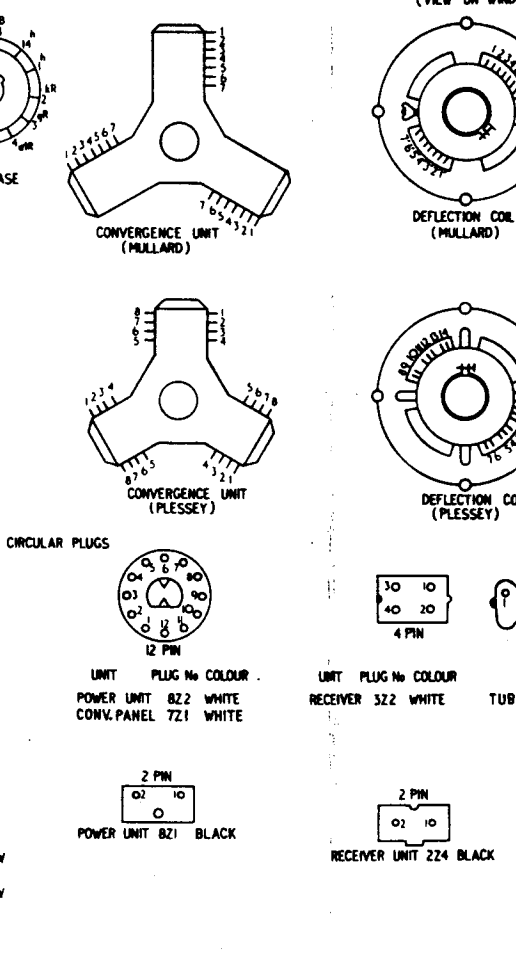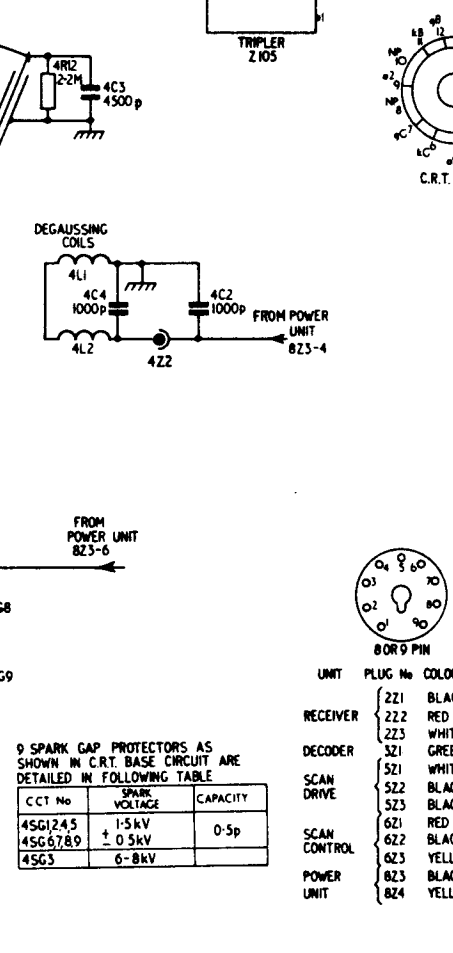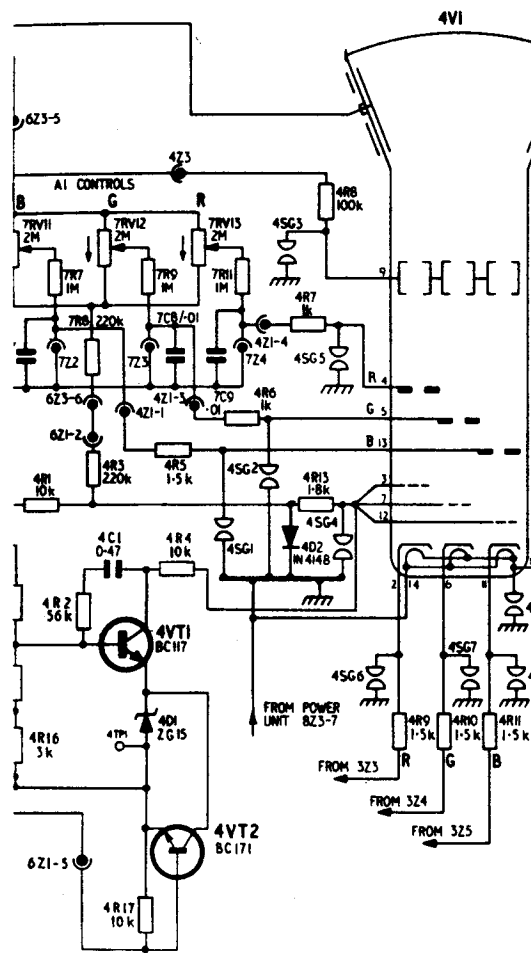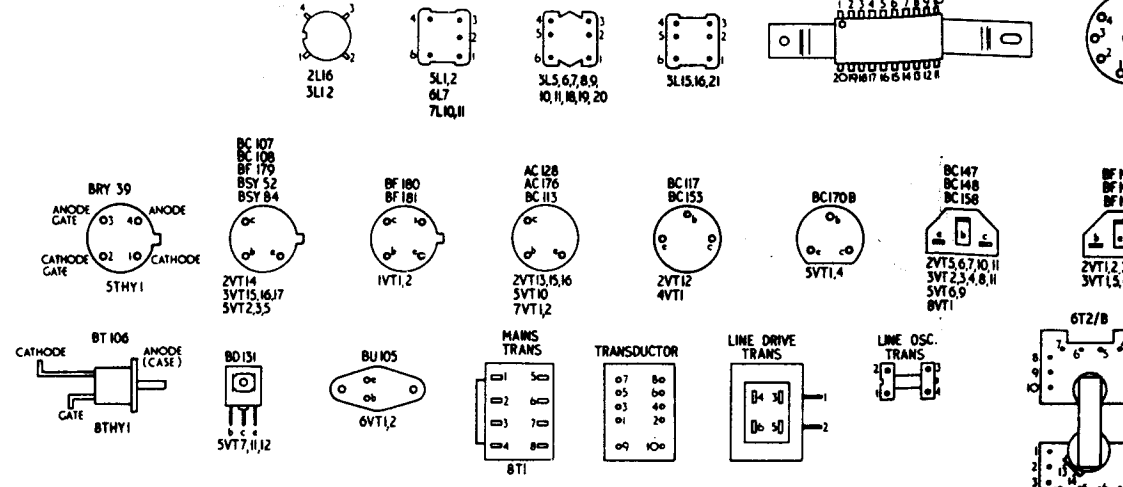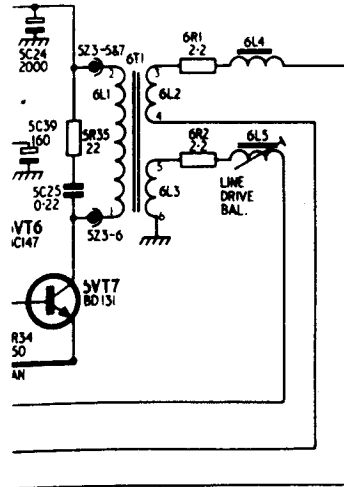

**COMPONENT PREFIXES**

Prefix	Unit	Component Prefix	Value
A770	U.H.F. TUNER UNIT	---	1
A809	I.F. AND SOUND UNIT	"	2
A807	DECODER & R.G.B DRIVES	"	3
	TUBE BASE PANEL	"	4
	SCAN DRIVE PANEL	"	5
A802	LINE SCAN, EHT UNIT, & SCAN CONTROL	"	6
A805	CONVERGENCE PANEL	"	7
A801	POWER SUPPLY PANEL ETC.	"	8

9 SPARK GAP PROTECTORS AS SHOWN IN C.R.T. BASE CIRCUIT ARE DETAILED IN FOLLOWING TABLE

CCT No	SPARK VOLTAGE	CAPACITY
4SG12,4,5	1-5 kV	0.5p
4SG6,7,8,9	+ 0.5 kV	
4SG3	6-8 kV	

**CONVERGENCE COILS**

CONVERGENCE	MULLARD	PLESSEY
LINE R.G.B.	4.5	7.8
LINE R.G.B.	6.7	5.6
FIELD R.G.B.	3	1.2
FIELD R.G.B.	2	3.4

**SCAN COILS**


SCAN	MULLARD	PLESSEY
LINE	1.2	6.14
LINE	1.2	7.13
FIELD	6.3	1.11
FIELD	3.6	4.8

INDICATES COUNTERCLOCKWISE ROTATION OF VARIABLE RESISTORS

KEY TO PLUGS & TRANSISTORS VIEWED ON PINS COILS VIEWED ON WINDINGS

RESISTOR VALUES IN Ω CAPACITOR VALUES IN pF UNLESS OTHERWISE ST

# TIMEBASE, E.H.T. & CONVERGENCE CIRCUITS DIAGRA

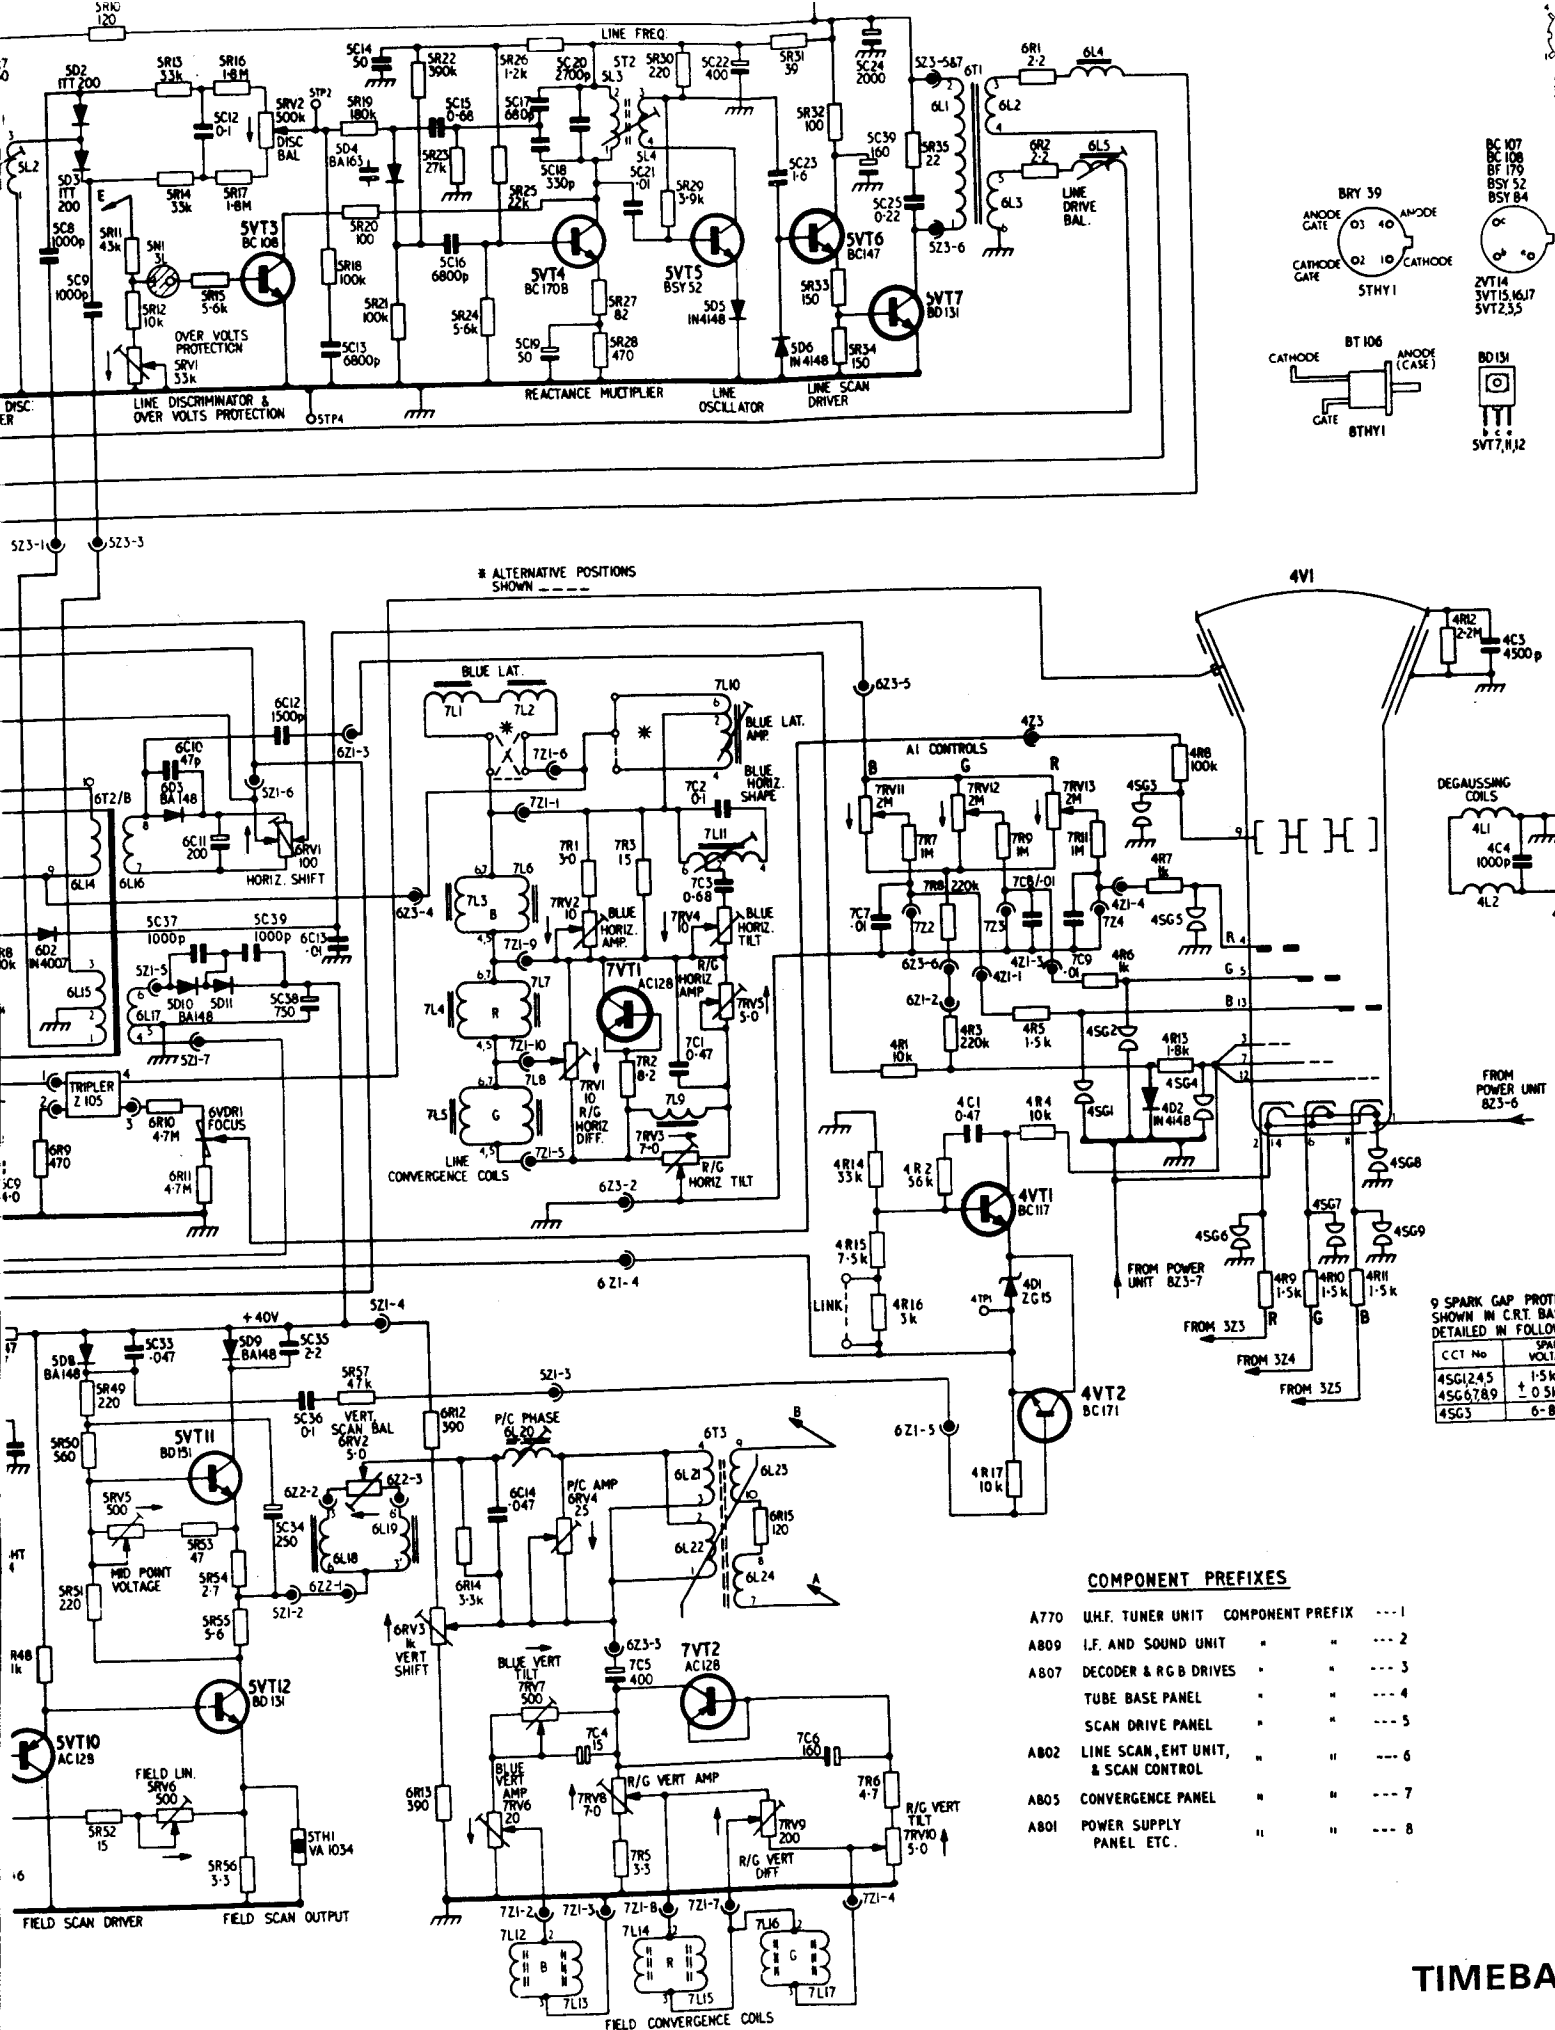

TIMEBA



red are robust  
t to apply the  
ocodile clips,  
ection of the

modified for opera-  
into the screen.  
rating position.  
ntly disturbed,

he event of any  
contrast level is  
ss and Contrast


ontrols 7RV11

control for the  
)

nt cover. (see

r using a high

ie

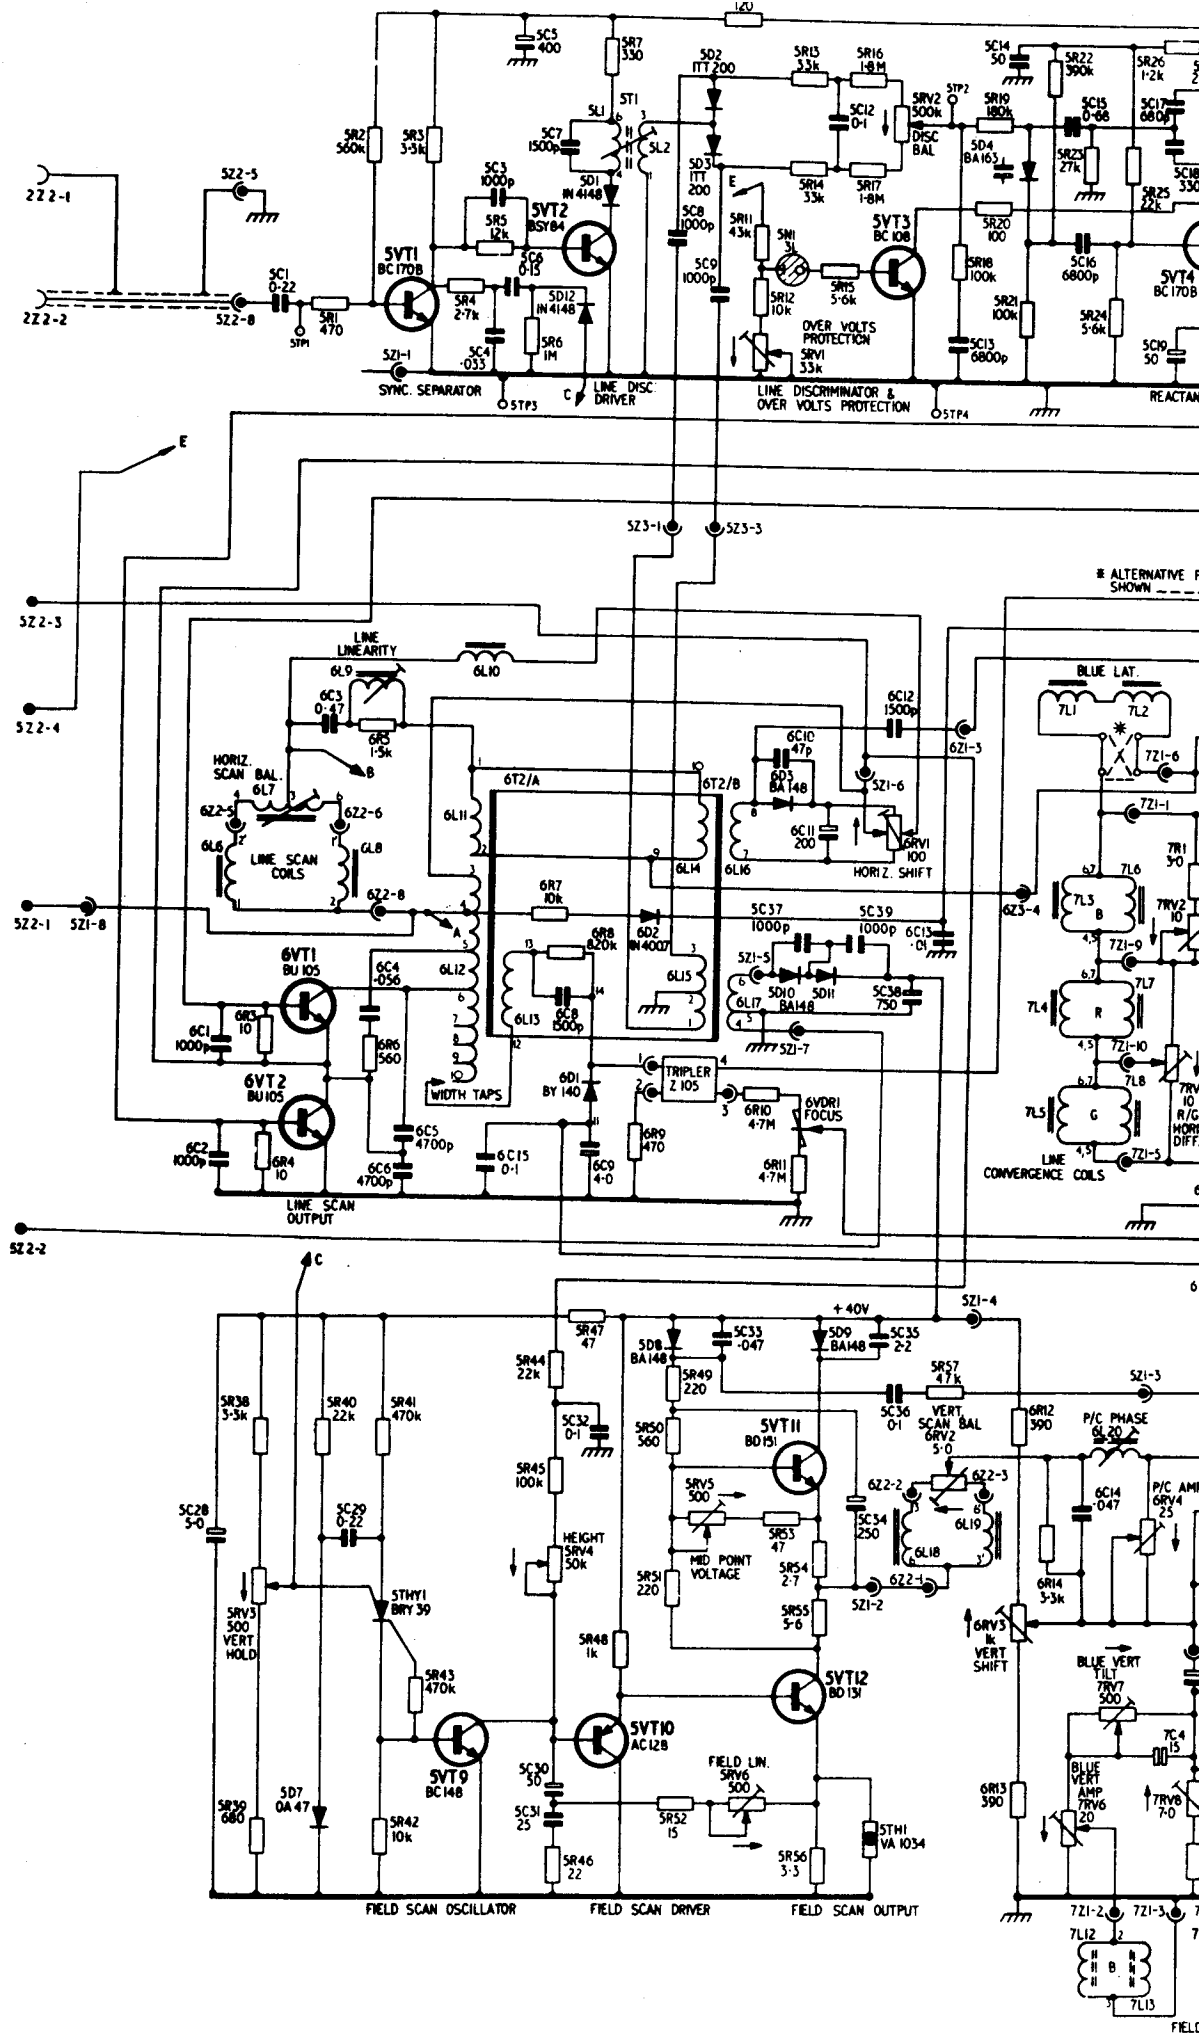

\* ALTERNATIVE F  
SHOWN - - -

LINE CONVERGENCE COILS

6

7

8

9

10

11

12

13

# BUSH MURPHY

## SERVICE INFORMATION

### MODELS CTV182S, CTV184S, CT187CS, CV1916S, CV2211S, CT2516CS

#### Single Standard Colour Television Receivers

*This range of television receivers is fully transistorised and the transistors which are employed are robust and reliable under normal operating conditions. However, it is necessary to stress the need to apply the precautions usual when servicing a transistorised receiver i.e. avoiding short-circuits by crocodile clips, leakage currents and/or overheating from a soldering iron particularly in the time-base section of the instrument.*

#### INSTALLATION

NOTE:—The adjustment of the picture controls, i.e. Height, Hold, etc. follows standard practice.

1. **Mains Adjustment.** The receiver as supplied is suitable for a 240 volts a.c. supply. If the receiver is modified for operation on voltages other than 240 volts a.c. this must be noted on the rear of the cabinet back.

2. **Degaussing.** Automatic degaussing is fitted which will normally take care of any magnetic effects induced into the screen. Use an external degaussing coil if required.

3. **Push Button Selection.** To tune, press in the appropriate button and allow it to return to its normal operating position. Withdraw the button slightly and turn it until the receiver is correctly tuned to the desired channel.

NOTE:—Clockwise rotation of a button selects channels in a descending order of frequency.

4. **Tuner AGC Delay Control.** This control should not be adjusted but if its setting has been inadvertently disturbed, however, the slider of the control should be rotated fully clockwise and left in this position.

5. **Purity.** If necessary, adjust the Purity Ring magnets for satisfactorily pure fields on each gun.

6. **Convergence.** Refer to diagram on convergence panel.

#### MAINTENANCE ADJUSTMENTS

*This information is included to enable the correct adjustment of the undermentioned controls to be made in the event of any of these controls being accidentally disturbed.*

##### 1. Pre-set I.F. Gain

1. Set the Brightness and Contrast Controls to a midway position.

2. Adjust the Pre-set I.F. Gain control 2RV2 (see I.F. Unit diagram) for a correctly contrasted picture.

3. To check, turn the Contrast control fully clockwise and then operate the channel push buttons. If the contrast level is incorrect resulting in over-loading reduce slightly the setting of the pre-set I.F. Gain control. Re-adjust Brightness and Contrast controls to normal operating positions.

##### 2. Grey Scale

1. Switch on, with no signal input.

2. Remove tuner socket 2Z1 from the i.f. unit to obtain a noise-free raster.

3. Set the R. G. & B. drive controls 3RV8, 3RV9, 3RV10 (see Decoder panel diagram) to maximum, the A1 controls 7RV11 7RV12, 7RV13 (see Convergence Panel diagram) to minimum and the Brightness control to maximum.

4. Adjust the A1 controls in this order (leave all gun switches ON).

(a) the Green A1 control 7RV12, to a just visible green raster.

(b) the Red A1 control 7RV13 until red is just introduced into the raster.

(c) the Blue A1 control 7RV11 until blue is just introduced into the raster.

5. Restore the tuner socket and the signal, adjust the Contrast control to a normal picture and set the Brightness control for the correct black level.

6. Adjust the appropriate A1 control to remove colouration if any, in the lowlights close to black level.

7. Adjust, if necessary, the appropriate drive control for no colouration in the peak white areas (Illuminant D).

8. Check that the overall grey scale is satisfactory.

##### 3. Focus

The Focus control 6VDR1 is adjusted, using an insulated screwdriver, through a hole in the e.h.t. compartment cover. (see Controls Diagram).

##### 4. Set E.H.T.

This control is set for an e.h.t. of 25kV measured under signal conditions with zero brightness on the c.r.t. screen using a high voltage meter whose impedance is not less than 30M ohms.

##### 5. E.H.T. over-volts protection control

This control should not be disturbed from its setting, as indicated by the paint spot, without reference to the recommended procedure.

#### THE SERVICE DEPARTMENT




### RANK BUSH MURPHY

A DIVISION OF THE RANK ORGANISATION

DRAYTON ROAD · BOREHAM WOOD · HERTFORDSHIRE · ENGLAND





Telephone: 01-953 6151 · Telex: 262741 · Cables: Rankboom Boreham Wood

Issued by the Technical Publications Department at R.B.M. London W4.



6156



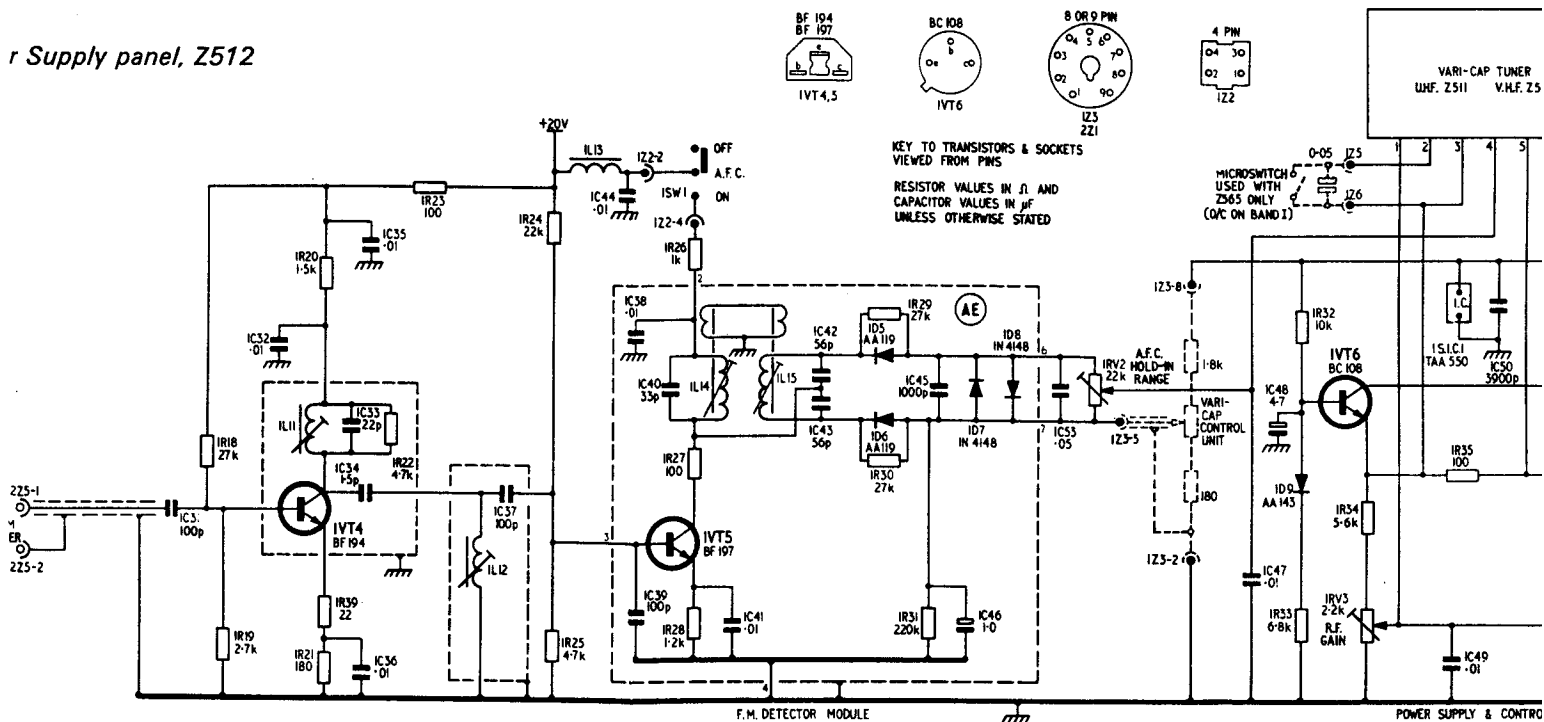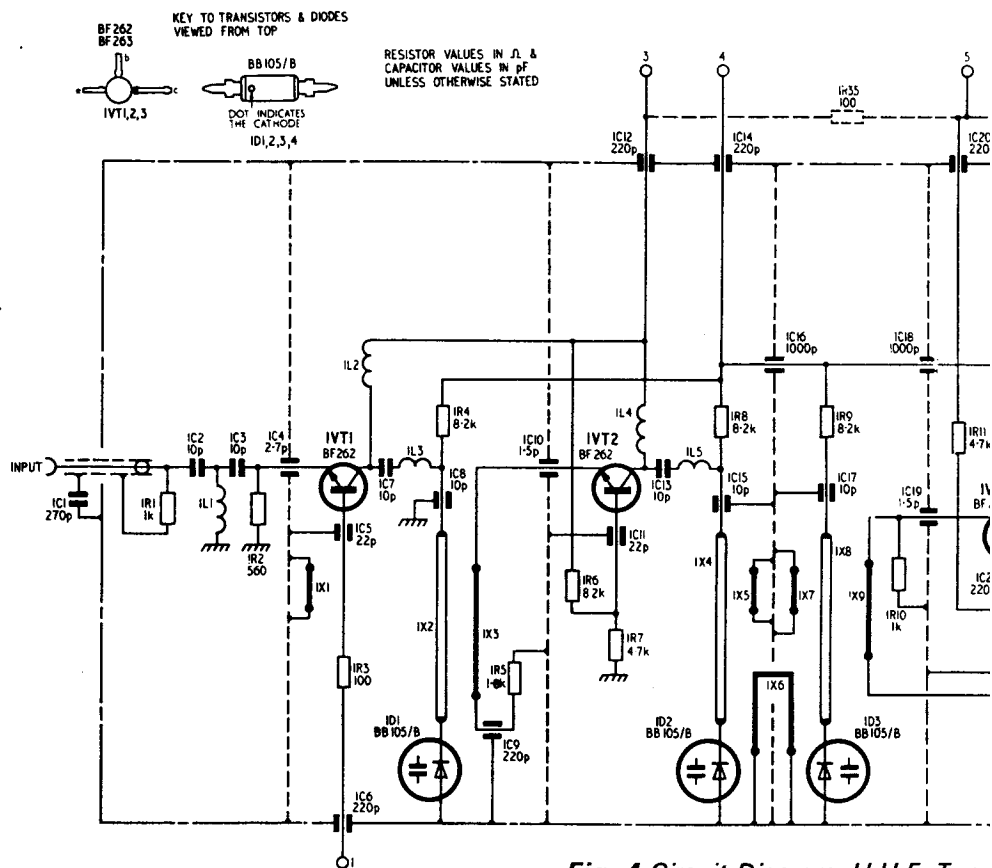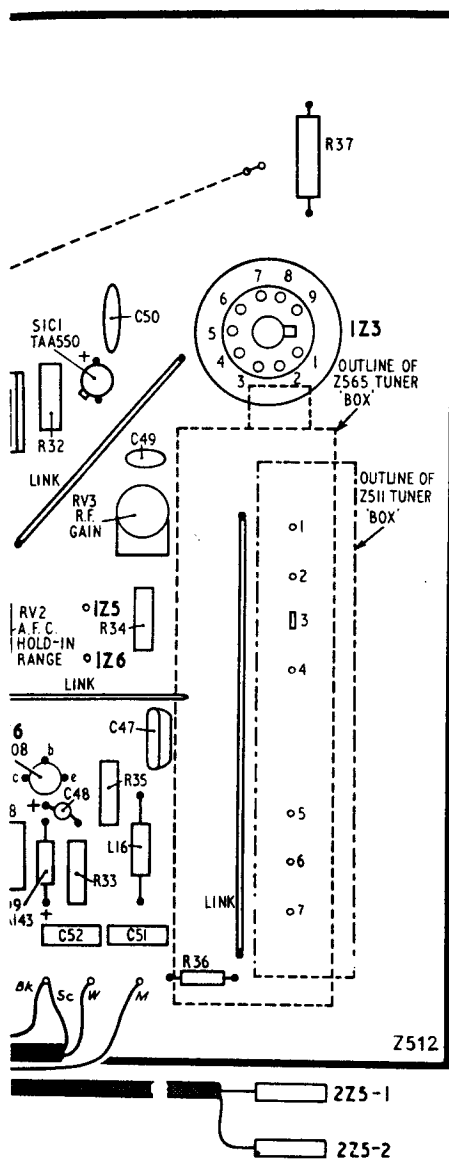

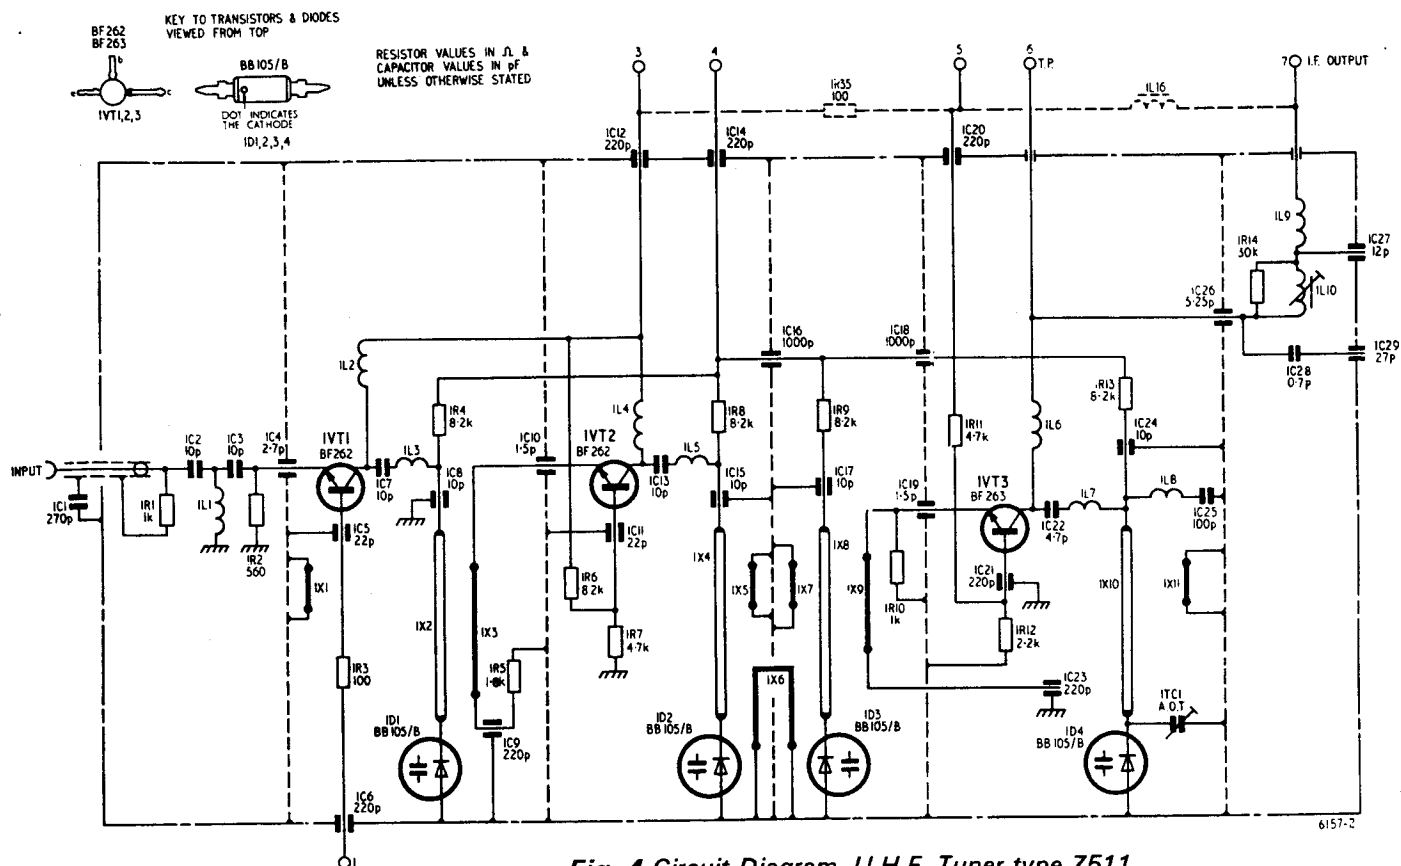


Fig. 4 Circuit Diagram, U.H.F. Tuner type Z511

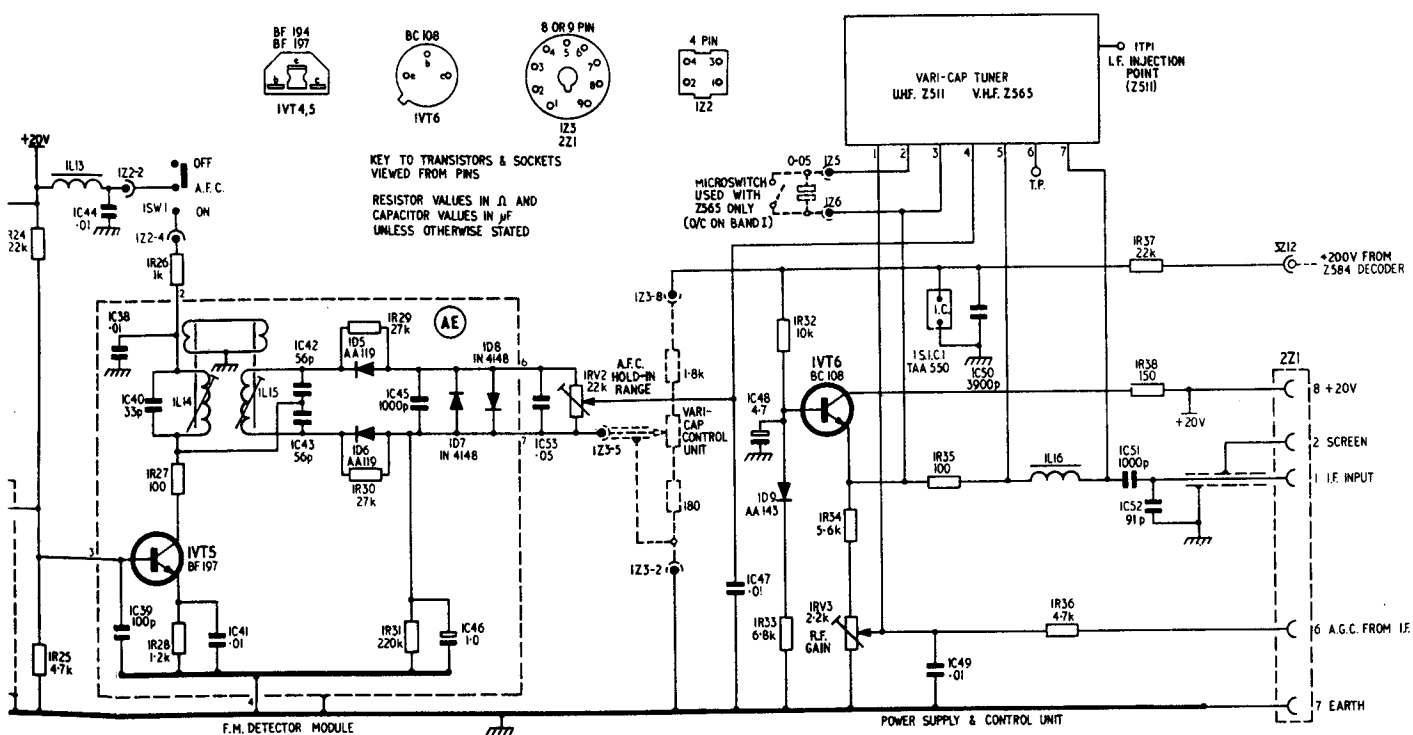


Fig. 5 Circuit Diagram, A.F.C. and Power Supply Panel, type Z512

## Electrical Parts, Z511 U.H.F. Tuner Unit

Note: As the parts contained within the varicap tuner units are set in position during manufacture, any repositioning will adversely affect the performance of the units. Dealers are strongly advised not to attempt to service these units.

### RESISTORS

Ref.	Value (ohms)	Tolerance (±%)	Rating (watts)	Part Number
1R1	1k	5	0.125	2052 1789
1R2	560	5	0.125	2052 1716
1R3	100	5	0.125	2052 1522
1R4	8.2k	5	0.125	2052 2022
1R5	1.8k	5	0.125	2052 1844
1R6	8.2k	5	0.125	2052 2022
1R7	4.7k	5	0.125	2052 1960
1R8	8.2k	5	0.125	2052 2022
1R9	8.2k	5	0.125	2052 2022
1R10	1k	5	0.125	2052 1789
1R11	4.7k	5	0.125	2052 1960
1R12	2.2k	5	0.125	2052 1868
1R13	8.2k	5	0.125	2052 2022
1R14	30k	5	0.125	2052 2162

### CAPACITORS

Ref.	Value (pF)	Tolerance (±%)	Rating (volts)	Part Number
1C1	270	+40 -20	3kV	2541 0167
1C2	10	20	3kV	2505 1301
1C3	10	±0.5p	40	2057 0067
1C4	2.7	±0.5p	250	2599 0068
1C5	22	10	250	2599 0056
1C6	220	10	500	2541 0313
1C7	10	±0.5pF	40	6882 0008
1C8	10	10	250	2599 0044
1C9	220	20	250	2599 0019
1C10	1.5	±0.5pF	250	2599 0081
1C11	22	10	250	2599 0056
1C12	220	10	500	2541 0313
1C13	10	±0.5pF	40	6882 0008
1C14	220	10	500	2541 0313
1C15	10	10	250	2599 0044
1C16	1000	+80 -20	300	2541 0210
1C17	10	10	250	2599 0044
1C18	1000	+80 -20	300	2541 0210
1C19	1.5	±0.5pF	250	2599 0081

### CAPACITORS—continued

Ref.	Value (pF)	Tolerance (±%)	Rating (volts)	Part Number
1C20	220	10	500	2541 0313
1C21	220	20	250	2599 0019
1C22	4.7	±0.5pF	40	6882 0021
1C23	220	20	250	2599 0019
1C24	10	10	250	2599 0044
1C25	100	20	250	2599 0093
1C26	5.25	±0.5pF	300	2541 0295
1C27	12	10	300	2541 0301
1C28	0.7	±0.25pF	500	2505 1349
1C29	27	10	500	2541 0337

### DIODES, VARICAP

Ref.	Type	Function	Part Number
1D1	BB105/B	Pre-selector tuning	3645 0029
1D2	BB105/B	Bandpass filter (primary) tuning	3645 0029
1D3	BB105/B	Bandpass filter (secondary) tuning	3645 0029
1D4	BB105/B	Oscillator tuning	3645 0029

### INDUCTORS

Ref.	Description	Part Number
1L1	Choke, high-pass filter	6811 0352
1L2	Choke	6811 0443
1L3	Choke/capacitor (1C7)	6882 0008
1L4	Choke	6811 0340
1L5	Choke/capacitor (1C13)	6882 0008
1L6	Choke	6811 0364
1L7	Choke/capacitor (1C22)	6882 0021
1L8	Choke, rejector	6811 0364
1L9	Choke	6811 0364
1L10	I.F. output coil	7100 4786

### TRANSISTORS

Ref.	Type	Function	Part Number
1VT1	BF262	R.F. amplifier	3632 0341
1VT2	BF262		3632 0341
1VT3	BF263	Mixer/oscillator	3632 0328

## Z512

### A.F.C. and Power Supply Panel

#### RESISTORS

Ref.	Value (ohms)	Tolerance (±%)	Rating (watts)	Part Number
1R18	27k	5	0.25	2055 5908
1R19	2.7k	5	0.25	2055 5647
1R20	1.5k	10	0.2	2001 0722
1R21	180	5	0.25	2055 5337
1R22	4.7k	10	0.125	2052 0797
1R23	100	5	0.25	2055 5271
1R24	22k	5	0.25	2055 5878
1R25	4.7k	5	0.25	2055 5702
1R26	1k	10	0.2	2001 0709
1R27	100	10	0.125	2052 0566
1R28	1.2k	10	0.3	2037 0702
1R29	27k	10	0.3	2037 0878
1R30	27k	10	0.3	2037 0878
1R31	220k	10	0.2	2001 1003
1R32	10k	10	0.2	2001 0837
1R33	6.8k	10	0.2	2001 0813
1R34	5.6k	10	0.2	2001 0801
1R35	100	10	0.2	2001 0564
1R36	4.7k	10	0.125	2052 0797
1R37	22k	5	0.25	2055 1113
1R38	150	10	0.2	2001 0588
1R39	22	5	0.25	2055 5088

#### RESISTORS, VARIABLE

Ref.	Value (ohms)	Rating (watts)	Function	Part Number
1RV2	22k	0.2	A.F.C. hold-in range	2355 0053
1RV3	2.2k	0.2	R.F. gain	2355 0089

#### CAPACITORS

Ref.	Value (μF)	Value (pF)	Tolerance (±%)	Rating (volts)	Part Number
1C31		100	10	500	2525 0486
1C32	0.01		+80 -20	50	2566 0019
1C33		22	2.5	125	2653 1306
1C34		1.5	10		2555 0007
1C35	0.01		+80 -20	50	2566 0019
1C36	0.01		+80 -20	50	2566 0019
1C37		100	2.5	125	2653 0284
1C38	0.01		+80 -20	50	2566 0019
1C39		100	2		2557 0195
1C40		33	5		2556 0207
1C41	0.01		+80 -20	50	2566 0019
1C42		56	2		2557 0158
1C43		56	2		2557 0158
1C44	0.01		+80 -20	50	2566 0019
1C45		1000	20		2561 0193



manufacture, any  
ily advised not to

Rating (volts)	Part Number
500	2541 0313
250	2599 0019
40	6882 0021
250	2599 0019.
250	2599 0044
250	2599 0093
300	2541 0295
300	2541 0301
500	2505 1349
500	2541 0337

Part Number
3645 0029
ary) tuning 3645 0029
ndary) tuning 3645 0029
3645 0029

Part Number
6811 0352
6811 0443
6882 0008
6811 0340
6882 0008
6811 0364
6882 0021
6811 0364
6811 0364
7100 4786

Part Number
3632 0341
3632 0341
3632 0328

Part Number
old-in range 2355 0053
in 2355 0089

Rating (volts)	Part Number
500	2525 0486
50	2566 0019
125	2653 1306
	2555 0007
50	2566 0019
50	2566 0019
125	2653 0284
50	2566 0019
	2557 0195
	2556 0207
50	2566 0019
	2557 0158
	2557 0158
50	2566 0019
	2561 0193

#### CAPACITORS

Ref.	Value (μF) (pF)	Tolerance (±%)	Rating (volts)	Part Number
1C46	1.0			2751 0402
1C47	0.01	20	250	2601 0008
1C48	4.7	20	25	2759 0173
1C49	0.01	+80 -20	50	2566 0019
1C50		3900 20	500	2563 0040
1C51		1000 20	500	2535 0134
1C52		91 5		2701 0636
1C53	0.05	+80 -20	10	2566 0342

#### DIODES

Ref.	Type	Function	Part Number
1D5	AA119}	F.M. detector diodes	3641 0020
1D6	AA119}		3641 0020
1D7	1N4148}	Clipping diodes.	3641 1601
1D8	1N4148}		3641 1601
1D9	AA143	Temperature compensation diode	3641 1607

#### INTEGRATED CIRCUIT

Ref.	Type	Function
1S1C1	TAA550	Varicap supply stabilizer

#### INDUCTORS

Ref.	Function
1L11	Bandpass coil (collector)
1L12	Bandpass coil (output)
1L13	R.F. choke
1L14	F.M. detector coil primary
1L15	F.M. detector coil secondary
1L16	Rejector coil

#### TRANSISTORS

Ref.	Type	Function
1VT4	BF194	Narrow band i.f. amplifier
1VT5	BF197	F.M. detector driver
1VT6	BC108	Voltage regulator

### Mechanical Parts

#### Item


Item	Part
Aerial socket moulding and lead	75
A.F.C. and Power Supply panel Z512 complete but less tuner	73
Contacts (5), for socket 2Z1	34
Contacts (3), for sockets 2Z5-1, 2 and 3Z12	34
Core, (2) iron dust, for coils 1L11, 12	32
Core, iron dust, for coil 1L14	32
Core, iron dust, for coil 1L15	32
Microswitch, used on Z564 conversion kit	34
Module <b>AE</b> , F.M. Detector, complete	72
Plug, 4 pin, black 1Z2	34
Plug, 9 pin, white, 1Z3	34
Socket moulding, for 2Z1, less contacts	34
Socket moulding (3), for 2Z5-1, 2 and 3Z12, less contacts	34
Tuner, Z511 complete	73
Tuner, Z565 complete	73

### MODIFICATIONS

INTEGRATED CIRCUIT			
Ref.	Type	Function	Part Number
1S1C1	TAA550	Varicap supply stabilizer	3646 0175
INDUCTORS			
Ref.	Type	Function	Part Number
1L11		Bandpass coil (collector)	7100 4737
1L12		Bandpass coil (output)	7100 4749
1L13		R.F. choke	7100 1797
1L14		F.M. detector coil primary	7100 4713
1L15		F.M. detector coil secondary	7100 4725
1L16		Rejector coil	7100 0070
TRANSISTORS			
Ref.	Type	Function	Part Number
1VT4	BF194	Narrow band i.f. amplifier	3632 0171
1VT5	BF197	F.M. detector driver	3632 0195
1VT6	BC108	Voltage regulator	3632 0201

					Part Number
	..	..	..	..	7500 4458
but less tuner..	..	..	..	..	7300 3815
	..	..	..	..	3439 0121
	..	..	..	..	3439 0066
	..	..	..	..	3242 0080
	..	..	..	..	3242 0134
	..	..	..	..	3242 0122
	..	..	..	..	3416 0139
	..	..	..	..	7200 1719
	..	..	..	..	3431 0642
	..	..	..	..	3431 0629
	..	..	..	..	3435 0019
is contacts	..	..	..	..	3439 0145
	..	..	..	..	7300 3797
	..	..	..	..	7300 3943

THE SERVICE DEPARTMENT



**RANK BUSH**  
A COMPANY WITHIN

DRAYTON ROAD BOREHAM WOOD

Telephone: 01-953 6151 Telex: 26274

Issued by the Technical Publications Depa